




# Skyline 3E - 40448

When you need access to great heights: Optimised transport dimensions, working heights of up to 14.70 m with convenient height adjustment.

## Product description

- When you need access to great heights: Optimised transport dimensions, working heights of up to 14.70 m with convenient height adjustment.
- Wheel assemblies with abrasion-resistant surfaces that will not damage the wall.
- Two ropes so that centre and top sections can be adjusted separately.
- Rung-by-rung height adjustment in a grid of 280 mm.
- The ladder with the Order No. 40448 is equipped with 2 light alloy supports for easy erection and stabilisation. (Not to be used as free-standing ladders!)
- Locks securely thanks to automatic spring loaded pawls.
- Improved plastic guide.
- Replaceable 2-component plastic end caps ensure secure positioning without the risk of slipping.
- Rungs and stiles made from extruded aluminium sections.

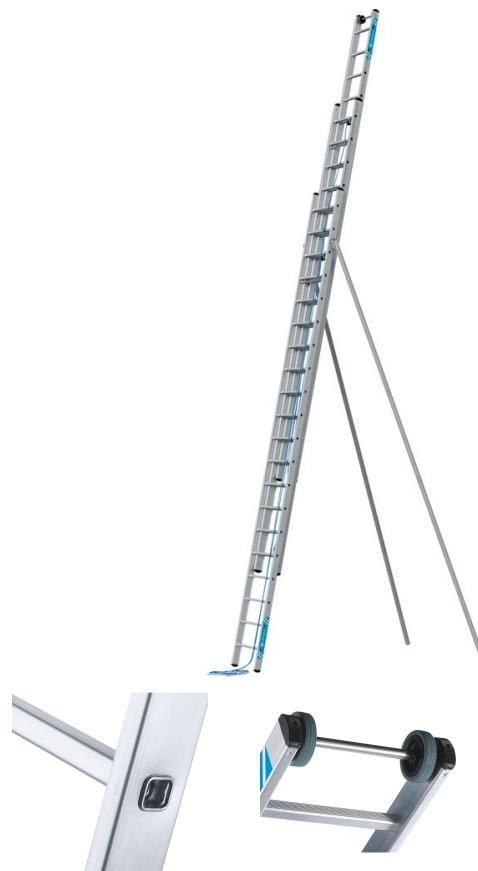

## Hints and special features

Complies with EN 131 Professional.

## Product features

Coating <b>natural</b>	Connection Stile-Rung <b>flanged</b>	External width of lower ladder <b>590 mm</b>	Load capacity <b>max. 150 kg</b>	Material <b>Aluminium</b>
Number of rungs <b>20</b>	Number of rungs <b>3 x 20</b>	Overall length, extended <b>14.2 m</b>	Overall length, retracted <b>5.8 m</b>	Pitch rung/tread <b>270 mm</b>



Standards <b>EN 131 professional</b>	Stile depth <b>98 mm</b>	Stile depth <b>98 mm</b>	Stile depth <b>98mm / 98mm</b>	Transport dimensions <b>5.820 mm × 718 mm × 242 mm</b>
Tread depth <b>30 mm</b>	Type rung/tread <b>serrated</b>	Warranty <b>10 years</b>	Weight <b>68 kg</b>	Wheels <b>Rubber</b>
Working height <b>14.7 m</b>				