




MultiTower S-PLUS 2T, 1,80 m - 52495

Maximum working area, safe and quick erection through advanced guardrail, low platform spacing and fewer single parts.

Product description

- Maximum working area, safe and quick erection through advanced guardrail, low platform spacing and fewer single parts.
- Safe and quick assembly and dismantling due to advanced guardrail (instead of railings and diagonal braces) and platforms at intervals of 2 m.
- Scaffolding width: 1.35 m; scaffolding length: 1.80 m.
- Working heights can be extended from 3.35 m to max. 13.20 m with standard parts.
- Scaffolding category 3 (maximum load of 200 kg/m²) according to DIN EN 1004.
- Standard castors: height-adjustable 200 mm swivel castors (Order No. 42917) for millimetre-perfect level adjustment.

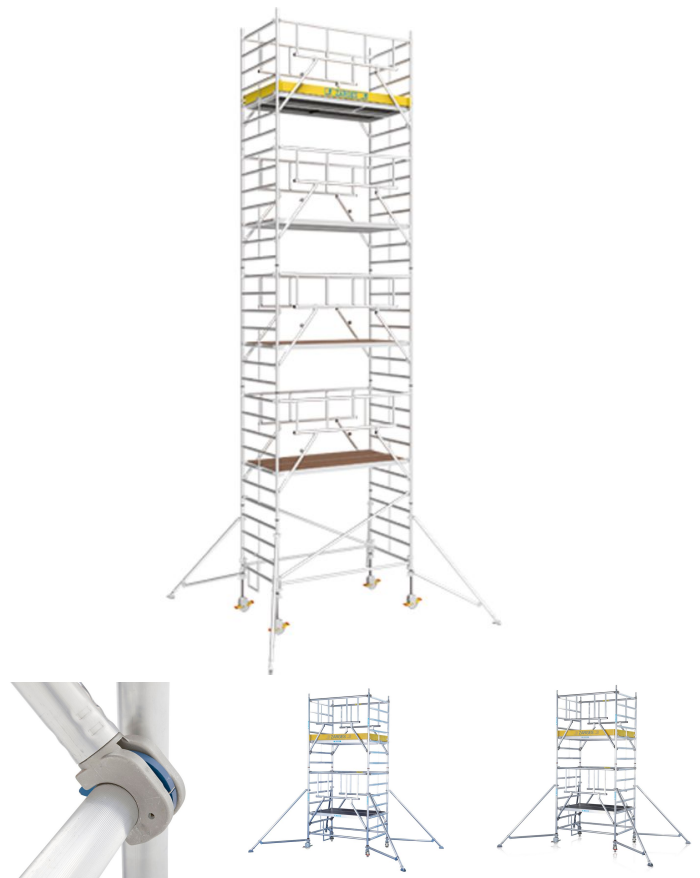

Hints and special features

Standard Z 600 mobile scaffold towers with stabilisers can also be retrofitted for stable set-up by adding the relevant S-PLUS single parts.

Product features

Claw type automatic	Height-adjustable castors: Yes	Overall height 9.65 m	Platform height 8.4 m	Platform length 1.8 m
Platform length 1.8 m	Platform size 1,2m x 1,8m	Platform width 1.2 m	Rung diameter 50 mm	Scaffolding class 3 (= 200 kg/m²)
Standards	Stile diameter	Transport dimensions	Warranty	Weight



EN 1004-1	50 mm	2.100 mm × 1.500 mm × 1.100 mm	10 years	300.5 kg
Wheel diameter 200 mm	Width scaffolding 1.35 m	Working height 10.4 m		