




# MultiTower S-PLUS 2T, 1,80 m - 52525

Maximum working area, safe and quick erection through advanced guardrail, low platform spacing and fewer single parts.

## Product description

- Maximum working area, safe and quick erection through advanced guardrail, low platform spacing and fewer single parts.
- Safe and quick assembly and dismantling due to advanced guardrail (instead of railings and diagonal braces) and platforms at intervals of 2 m.
- Scaffolding width: 1.35 m; scaffolding length: 1.80 m.
- Working heights can be extended from 3.35 m to max. 13.20 m with standard parts.
- Scaffolding category 3 (maximum load of 200 kg/m<sup>2</sup>) according to DIN EN 1004.
- Standard castors: height-adjustable 200 mm swivel castors (Order No. 42917) for millimetre-perfect level adjustment.

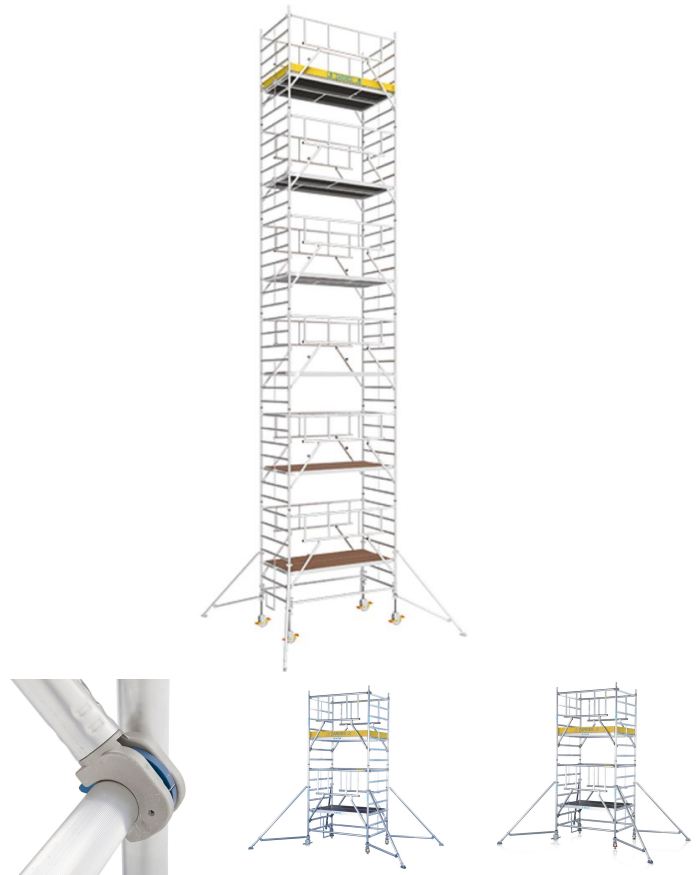

## Hints and special features

Standard Z 600 mobile scaffold towers with stabilisers can also be retrofitted for stable set-up by adding the relevant S-PLUS single parts.

## Product features

Claw type <b>automatic</b>	Height-adjustable castors: <b>Yes</b>	Overall height <b>12.45 m</b>	Platform height <b>11.2 m</b>	Platform length <b>1.8 m</b>
Platform length <b>1.8 m</b>	Platform size <b>1,2m x 1,8m</b>	Platform width <b>1.2 m</b>	Rung diameter <b>50 mm</b>	Scaffolding class <b>3 (= 200 kg/m<sup>2</sup>)</b>
Standards	Stile diameter	Transport dimensions	Warranty	Weight



<b>EN 1004-1</b>	<b>50 mm</b>	<b>2.100 mm × 1.500 mm × 1.400 mm</b>	<b>10 years</b>	<b>397.9 kg</b>
Wheel diameter <b>200 mm</b>	Width scaffolding <b>1.35 m</b>	Working height <b>13.2 m</b>		