




# AXIC-I

Simple lanyard with elasticated arm according to EN 354:2010 with energy absorber according to EN 355:2002. The length is flexible and can be varied between 1.40 m and 1.80 m. Equipped with rebar hook.

## Product description

- Simple lanyard according to EN 354:2010 with energy absorber according to EN 355:2002.
- Flexible length between 1.40 and 1.80 m.
- Equipped with rebar hook.
- Suitable for people up to 150 kg.
- ZmartCheck - provides quick access to security-relevant information.
- DIN 19427
- Suitable for sharp edges, RfU 11.074.

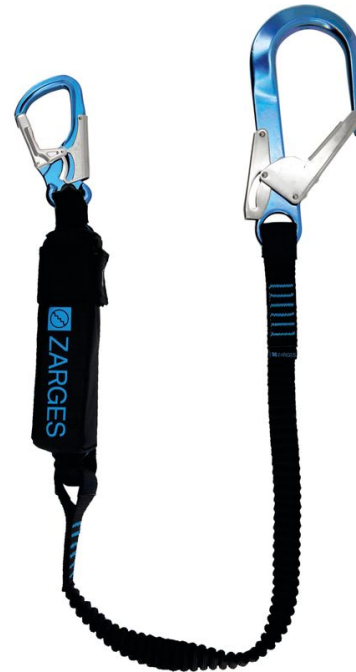

## Product features

|                                                   |                                  |                                      |                                     |                                |
|---------------------------------------------------|----------------------------------|--------------------------------------|-------------------------------------|--------------------------------|
| Anchoring Carabiner<br><b>Aluminum rebar hook</b> | Length Range<br><b>1,4-1,8 m</b> | Material Webbing<br><b>Polyester</b> | Maximum Service Life<br><b>10 J</b> | Maximum length<br><b>1.8 m</b> |
| Minimum length<br><b>1.4 m</b>                    |                                  |                                      |                                     |                                |

## Product variants

|                                                     |                                        |                                      |
|-----------------------------------------------------|----------------------------------------|--------------------------------------|
| SKU<br><b>47808</b>                                 | SKU<br><b>47859</b>                    | SKU<br><b>47862</b>                  |
| Harness Carabiner<br><b>Aluminum snap carabiner</b> | Energy Absorber<br><b>Yes</b>          | Energy Absorber<br><b>Yes</b>        |
| Standards<br><b>EN 354EN 355</b>                    | Harness Carabiner<br><b>Twist-lock</b> | Harness Carabiner<br><b>Tri-lock</b> |



|                         |                                  |                                  |
|-------------------------|----------------------------------|----------------------------------|
| Weight<br><b>1.1 kg</b> | Smart Check<br><b>Yes</b>        | Smart Check<br><b>Yes</b>        |
|                         | Standards<br><b>EN 354EN 355</b> | Standards<br><b>EN 354EN 355</b> |
|                         | Weight<br><b>1.15 kg</b>         | Weight<br><b>1.15 kg</b>         |