


Access steps with platform

- 40155388

Stationary access to buildings and machines with platforms.

Product description

- Different angles of inclination, 45° for comfortable access, 60° for confined spaces.
- Selection of tread widths 600 mm, 800 mm or 1000 mm.
- Serrated aluminium (R10) step and platform surfaces as standard. Also available as steel open grid (R12) and steel perforated plate (R13) for extra non-slip properties.
- Individually adjustable platform lengths.
- Support section mounting element for use as a free-standing work platform.
- Individual guardrail configuration on the platform, optionally with swing door or pole barrier.
- Maximum flexibility with optional handrails and guardrails which can be removed without tools.
- Stiles made from high-strength aluminium extrusions with screw channels for flexible assembly options.
- Quick and simple assembly with the ZARGES connection system with a high level of pre-assembly.

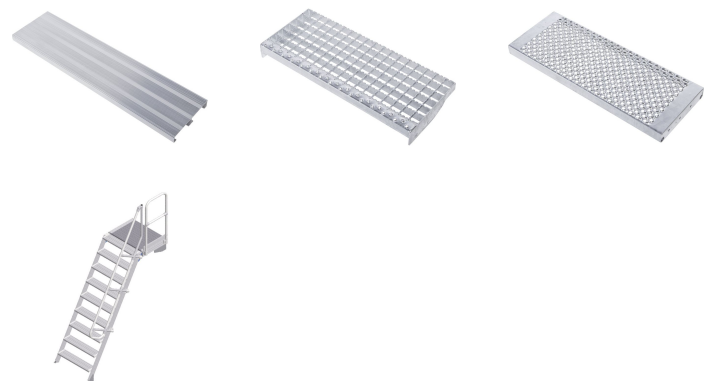

Hints and special features

We recommend equipping the product in accordance with the German Equipment and Product Safety Act (ProdSG) with two-sided handrails and, for steps with platforms or maintenance platforms, all-round fall protection (e.g. guardrails). If handrails or guardrails are not desired, the operator must ensure sufficient regulatory protection.

Configure your individual steps at www.zargesconfigurator.com Can't find the solution you need? Contact our specialist consultants! We have solutions even for complex requirements! Tel.: +49 881 687 -101

Standard applied: DIN EN ISO 14122.

Product features

Inclination 60 °	Load capacity max. 300 kg	Max. load per tread 150 kg	Number of treads 9	Overall span 1984 mm
Platform length 600 mm	Standards NF EN ISO 14122-4	Tread width 800 mm	Vertical height 2250 mm	Warranty 10 years