
ZARGES

DATA SHEET

# Roof ladders - 40398

Safe access to various roof pitches via high-stability stationary ladder with rungs arranged eccentrically.

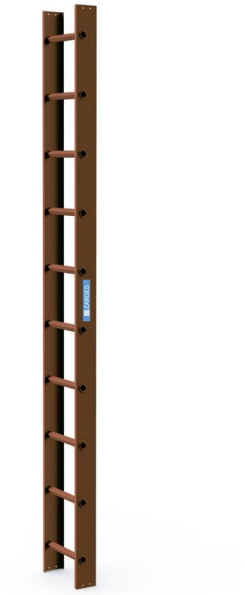

## PRODUCT DESCRIPTION

- Safe access to various roof pitches via high-stability stationary ladder with rungs arranged eccentrically.
- Safe, square rungs with 2 differently inclined tread surfaces.
- Robust stile sections ensure 80 mm safety clearance between the rungs and the roof surface.
- Problem-free coordination of the ladder to the relevant roof length.
- Off-centre rung arrangement.
- Maximum loading capacity 150 kg.
- Outside width: 340 mm.
- High strength, non-twist rung/stile connections.
- Rungs made from extruded aluminium sections for maximum safety.

### HINTS AND SPECIAL FEATURES

Connecting straps are included with every roof ladder as standard.

## PRODUCT FEATURES

| Property | Value |
|---|---|
| Coating | powder-coated |
| Colour | Copper-brown |
| Connection Stile-Rung | flanged |
| Ladder width | 340 mm |

| Property | Value |
|---|---|
| Load capacity | max. 150 kg |
| Material | Aluminium |
| Number of rungs | 10 |
| Overall length | 2.8 m |
| Pitch rung/tread | 280 mm |
| Stile depth | 110 mm |
| Transport dimensions | 2.800 mm × 340 mm × 110 mm |
| Tread depth | 30 mm |
| Type rung/tread | serrated |
| Warranty | 10 years |
| Weight | 4.8 kg |

## ACCESSORIES AND SPARE PARTS

### ACCESSORIES 6



**Lock for roof ladder safety hooks**
SKU 41695



**Mobile ridge hook**
SKU 40980



**Roof safety hooks to DIN EN 517**
SKU 40969



**Roof safety hooks to DIN EN 517**
SKU 40490



**Roof safety hooks to DIN EN 517**
SKU 41386



**Roof safety hooks to DIN EN 517**
SKU 40492

**ZARGES GMBH**
Zargesstraße 7
82362 Weilheim

Tel: +49 (0)881-687-100
Fax: +49 (0)881-687-500
zarges@zarges.de

www.zarges.com
Effective 11/13/2026
Subject to change or error.