


Skyline 3E - 40446

When you need access to great heights: Optimised transport dimensions, working heights of up to 14.70 m with convenient height adjustment.

Product description

- When you need access to great heights: Optimised transport dimensions, working heights of up to 14.70 m with convenient height adjustment.
- Wheel assemblies with abrasion-resistant surfaces that will not damage the wall.
- Two ropes so that centre and top sections can be adjusted separately.
- Rung-by-rung height adjustment in a grid of 280 mm.
- The ladder with the Order No. 40448 is equipped with 2 light alloy supports for easy erection and stabilisation. (Not to be used as free-standing ladders!)
- Locks securely thanks to automatic spring loaded pawls.
- Improved plastic guide.
- Replaceable 2-component plastic end caps ensure secure positioning without the risk of slipping.
- Rungs and stiles made from extruded aluminium sections.

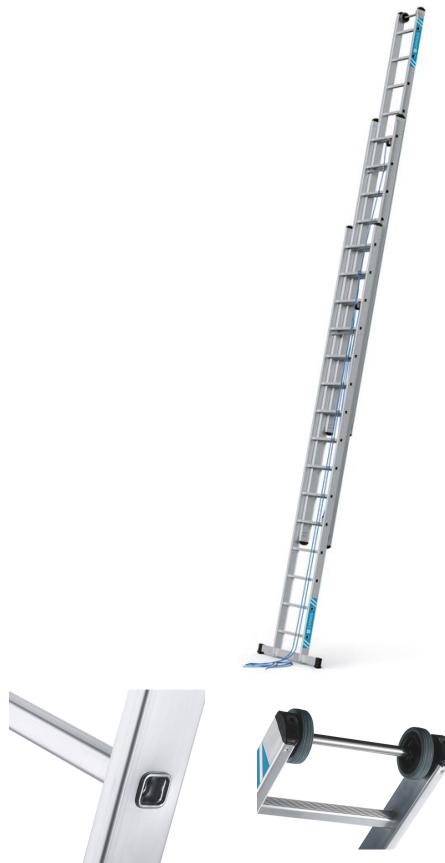

Hints and special features

Complies with EN 131 Professional.



Product features

Coating natural	Connection Stile-Rung flanged	External width of lower ladder 560 mm	Load capacity max. 150 kg	Material Aluminium
Number of rungs 15	Number of rungs 3 × 15	Overall length, extended 10.55 m	Overall length, retracted 4.4 m	Pitch rung/tread 270 mm
Standards EN 131 professional	Stile depth 86 mm	Stile depth 98 mm	Stile depth 86mm / 98mm	Transport dimensions 4.420 mm × 565 mm × 228 mm
Tread depth 30 mm	Type rung/tread serrated	Warranty 10 years	Weight 45 kg	Wheels Rubber
Wide crosspiece 1.2 m	Working height 11.15 m	certification-mark-pf TÜV-SÜD		