


EFA B - 41260

For flexible applications in electrical or chemical environments and for working under voltage.

Product description


- For flexible applications in electrical or chemical environments and for working under voltage.
- Stiles and rungs made of glass-fibre-reinforced plastic for particularly high chemical resistance.
- Complies with the high-voltage test for ladders of insulating material in accordance with DIN EN 61 478 or VDE 0682 Section 6.5 Category 1/30 KV.
- Resistance to ageing in accordance with DIN EN ISO 4892-2.
- Suitable for working in high-voltage environments (1000 V AC, 1500 V DC).
- Stiles and rungs (30 x 30 mm) made from glass-fibre-reinforced plastic for particularly high chemical resistance.
- High-strength perlon belts prevent splay.
- Replaceable 2-component plastic end caps ensure positioning without the risk of slipping and at the same time provide firm seating in the stile.

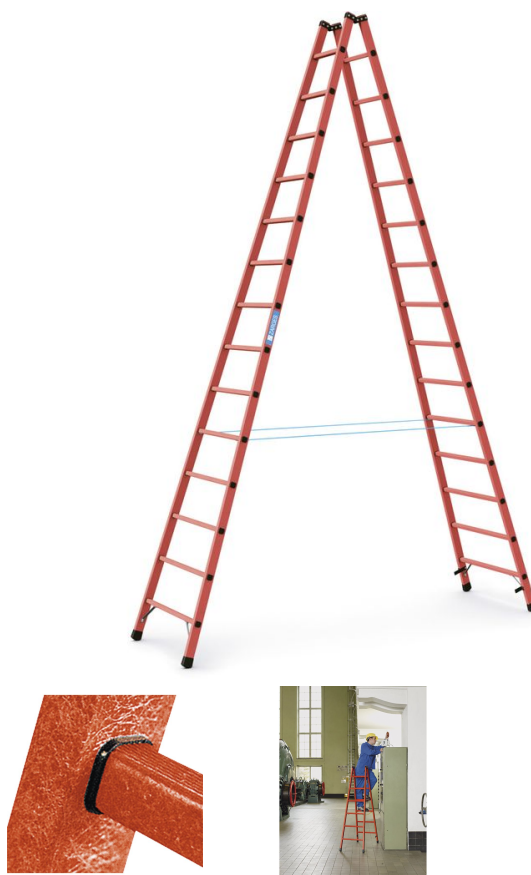

Hints and special features

Complies with EN 131 Professional.

Product features



Anti splay Belt strap	Base 2,7 m × 0,78 m	Load capacity max. 150 kg	Material Glass-fibre reinforced plastic	Number of rungs 14
Number of rungs 2 × 14	Overall base width 0.77 m	Overall length 4.12 m	Pitch rung/tread 265 mm	Standards EN 131 professional
Stile depth 58 mm	Transport dimensions 4.150 mm × 770 mm × 160 mm	Tread depth 30 mm	Type rung/tread serrated	Vertical ladder height 3.95 m
Warranty 10 years	Weight 24.6 kg	Working height 5.2 m		