


# Comfortstep S - 41421

Protection for your shins: high degree of comfort while working through padded treads.

## Product description


- Protection for your shins: high degree of comfort while working through padded treads.
- Deep treads with padded front edge for standing comfort.
- Large platform that allows personnel to stand safely and comfortably even when working for extended periods.
- 80 mm deep treads with padded front edges.
- Abrasion-resistant, anodised stiles.
- Platform made from extruded aluminium (300 mm × 250 mm) for safe and comfortable standing even when working for longer periods of time.
- Practical aluminium storage tray for small items and tools.
- Treads with plastic-cushioned front edges.
- Screwed connection between treads and stile.
- Treads and stiles made from extruded aluminium sections.

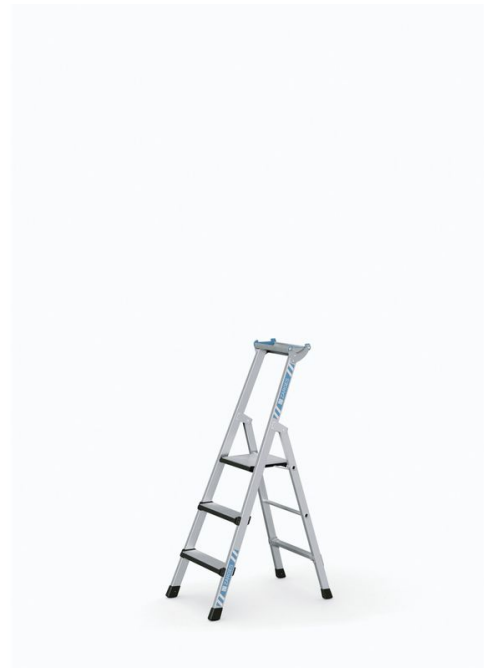

## Hints and special features

Complies with EN 131 Professional.

## Product features



Base <b>0,75 m × 0,5 m</b>	Coating <b>anodised</b>	Connection Stile-Rung <b>bolted</b>	Load capacity <b>max. 150 kg</b>	Material <b>Aluminium</b>
Number of rungs, incl. platform <b>3</b>	Overall base width <b>0.5 m</b>	Overall length <b>1.52 m</b>	Pitch rung/tread <b>250 mm</b>	Platform height <b>0.75 m</b>
Platform length <b>250 mm</b>	Platform width <b>300 mm</b>	Standards <b>EN 131 professional</b>	Stile depth <b>42 mm</b>	Stile depth <b>42 mm</b>
Stile depth steps/back stay <b>42mm / 42mm</b>	Transport dimensions <b>1.520 mm × 500 mm × 150 mm</b>	Tray <b>Aluminium</b>	Tread depth <b>80 mm</b>	Type rung/tread <b>padding on front tread edges</b>
Vertical ladder height <b>1.38 m</b>	Warranty <b>10 years</b>	Weight <b>6.4 kg</b>	Working height <b>2.75 m</b>	certification-mark-pf <b>TÜV-SÜD</b>