


## R13step B - 41549

The ladder with the highest non-slip performance thanks to R13 treads for oily and wet environments.

### Product description

- The ladder with the highest non-slip performance thanks to R13 treads for oily and wet environments.
- 80 mm deep treads with R13 tread and grooves, as well as perforations to allow liquids to drain, for noticeably better traction in any situation.
- Clean hands thanks to wear-resistant anodised stiles.
- Sturdy hinges made of die-cast aluminum.
- High-strength polyester webbing with a sewn-in attachment loop – durable and resistant to wear and tear.
- The 280 mm-high step provides the greatest working height in its class.
- Replaceable 2-component plastic end caps ensure positioning without risk of slipping and at the same time provide firm seating in the stile.
- Robust design: flanged step-rail connection with extruded aluminum profiles.

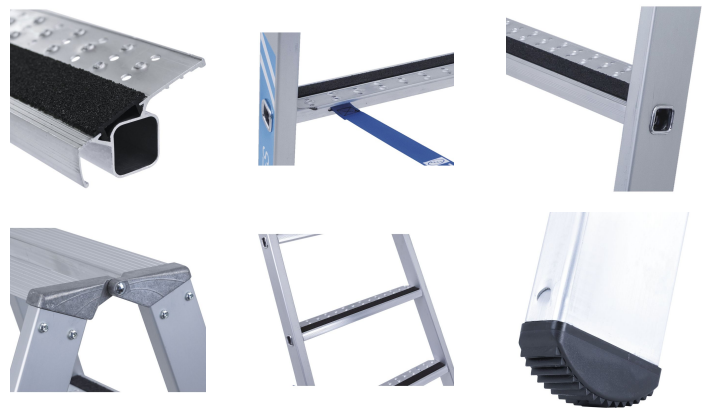

### Hints and special features

Complies with EN 131 Professional.

### Product features

|            |                 |
|------------|-----------------|
| Anti splay | Belt strap      |
| Base       | 0,79 m × 0,44 m |



|                        |  |
|------------------------|--|
| Certification          | TÜV-SÜD  |
| Coating                | anodised   |
| Connection Stile-Rung  | flanged  |
| Load capacity          | max. 150 kg                                      |
| Material               | Aluminium  |
| Number of treads       | 3  |
| Number of treads       | 2 × 3  |
| Overall base width     | 0.44 m   |
| Overall length         | 0.88 m   |
| Pitch rung/tread       | 265 mm   |
| Standards              | EN 131 professional                              |
| Stile depth            | 68 mm  |
| Transport dimensions   | approx. 880 mm × approx. 450 mm × approx. 220 mm |
| Tread depth            | 80 mm  |
| Type rung/tread        | R13 tread  |
| Vertical ladder height | 0.8 m  |
| Warranty               | 10 years   |
| Weight                 | 5.1 kg   |
| Working height         | 2.3 m  |

ZARGES GmbH

Zargesstraße 7

82362 Weilheim

Tel: +49 (0)881-687-100

Fax: +49 (0)881-687-500

[zarges@zarges.de](mailto:zarges@zarges.de)

[www.zarges.com](http://www.zarges.com)

Effective 7/2/2026

Subject to change or error.