


## R13step B - 41555

The ladder with the highest non-slip performance thanks to R13 treads for oily and wet environments.

### Product description

- The ladder with the highest non-slip performance thanks to R13 treads for oily and wet environments.
- 80 mm deep treads with R13 surface and perforations to drain fast.
- Abrasion-resistant, anodised stiles.
- Hinges of diecast aluminium.
- High-strength perlon belts prevent splay.
- Maximum working heights thanks to 280mm high access.
- Replaceable 2-component plastic end caps ensure positioning without risk of slipping and at the same time provide firm seating in the stile.

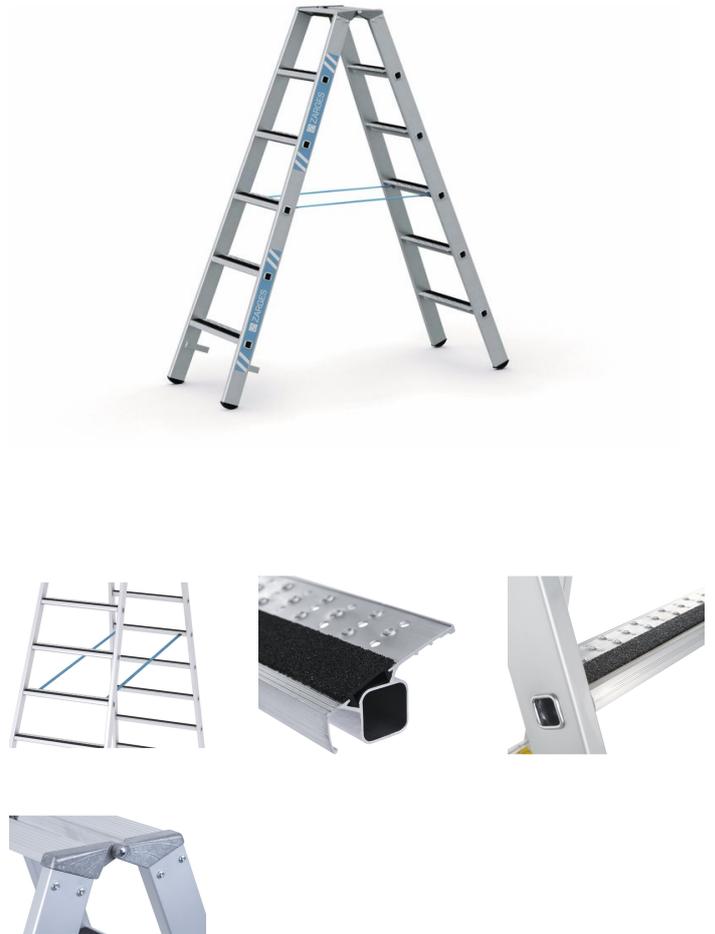

### Hints and special features

Complies with EN 131 Professional.

### Product features

Anti splay	Belt strap
Base	1,37 m × 0,53 m
Coating	anodised
Connection Stile-Rung	flanged
Load capacity	max. 150 kg
Material	Aluminium



Number of treads	6
Number of treads	2 × 6
Overall base width	0.53 m
Overall length	1.7 m
Pitch rung/tread	265 mm
Standards	EN 131 professional
Stile depth	73 mm
Transport dimensions	approx. 1.750 mm × approx. 530 mm × approx. 220 mm
Tread depth	80 mm
Type rung/tread	R13 tread
Vertical ladder height	1.58 m
Warranty	10 years
Weight	9.3 kg
Working height	3.05 m
certification-mark-pf	TÜV-SÜD

ZARGES GmbH

Zargesstraße 7

82362 Weilheim

Tel: +49 (0)881-687-100

Fax: +49 (0)881-687-500

[zarges@zarges.de](mailto:zarges@zarges.de)

[www.zarges.com](http://www.zarges.com)

Effective 3/29/2026

Subject to change or error.