


## ZAP Safemaster S - 41676

The flanged platform ladder can now be retrofitted with triangular stabilisers to comply with EN 131-7.

### Product description

- The flanged platform ladder can now be retrofitted with triangular stabilisers to comply with EN 131-7.
- Optimal stability thanks to a rigid connection on both sides with pressure reinforcement.
- Foldable anodised handrails allow it to take up less space during transport.
- The handle on the platform allows the ladder to be folded up quickly and effortlessly.
- Aluminum work platform, approx. 400 x 400 mm, with three-sided safety railing (height 1,000 mm).
- Anodised handrails and guardrails.
- Generously sized storage tray for tools and small parts.
- Treads 80 mm deep, with ZARGES Safer Step Technology.
- Can be retrofitted with optional stabiliser sets to comply with EN 131, Part 7.

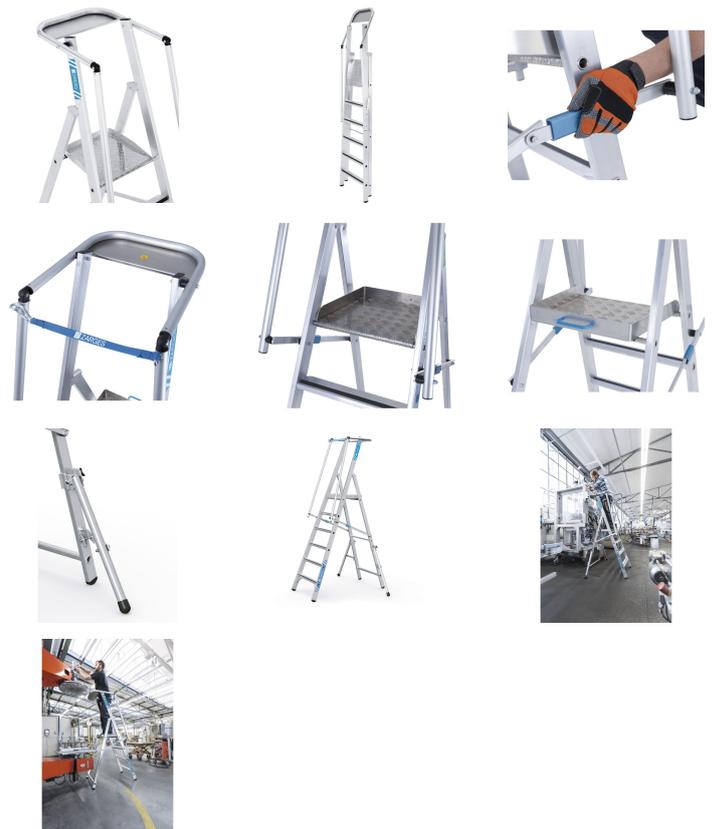

### Product features

Anti splay	Rigid locking bar
Certification	TÜV-SÜD



Guardrail height	1000 mm
Height including railing	2.6 m
Load capacity	max. 150 kg
Number of rungs, incl. platform	6
Overall base width	0.71 m
Overall length	2.99 m
Platform height	1.58 m
Platform length	400 mm
Platform material	Aluminium ribbed plate
Platform width	400 mm
Standards	EN 131 professional
Stile depth	73 mm
Stile depth	58 mm
Stile depth steps/back stay	73mm / 58mm
Transport dimensions	approx. 2.990 mm × 700 mm × 210 mm
Tray	Aluminium
Tread depth	80 mm
Type rung/tread	Safer Step
Warranty	10 years
Weight	16.1 kg
Working height	3.58 m



ZARGES

ZARGES GmbH

Zargesstraße 7

82362 Weilheim

Tel: +49 (0)881-687-100

Fax: +49 (0)881-687-500

[zarges@zarges.de](mailto:zarges@zarges.de)

[www.zarges.com](http://www.zarges.com)

Effective 5/22/2026

Subject to change or error.