


Nova S - 42456

The classic model for safe standing and comfortable working, with a practical storage tray and high-stability patented rung-stile connection.

Product description

- The classic model for safe standing and comfortable working, with a practical storage tray and high-stability patented rung-stile connection.
- Large platform with anti-slip ribbing.
- Practical tray with plenty of space for tools and small items.
- 80 mm deep surfaces to stand on.
- Stable tread construction: robust, durable, flanged rung-stile connection.
- The extruded aluminium sections give the platform optimum stability.
- Two extruded section bridge raisers.
- Firm positioning thanks to anti-slip plastic end caps.
- Enclosed rung profile and integrated guide tube.

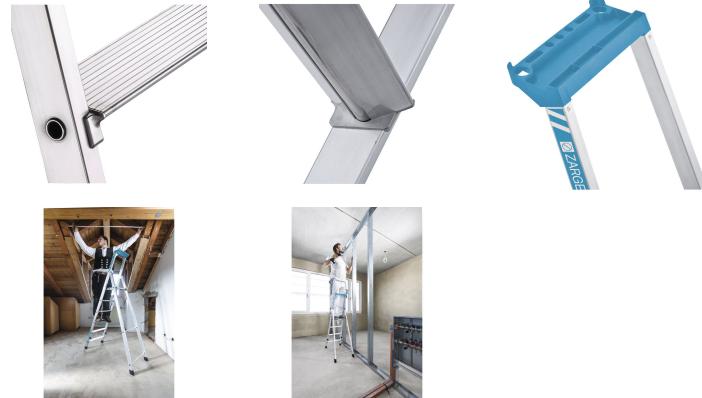

Hints and special features

Complies with EN 131 Professional.

Product features

Base 1,14 m x 0,49 m	Coating natural	Connection Stile-Rung flanged	Load capacity max. 150 kg	Material Aluminium
--------------------------------	---------------------------	---	-------------------------------------	------------------------------



Number of rungs, incl. platform 6	Overall base width 0.49 m	Overall length 2.03 m	Pitch rung/tread 216 mm	Platform height 1.26 m
Platform length 250 mm	Platform width 250 mm	Standards EN 131 professional	Stile depth 48 mm	Stile depth 48 mm
Stile depth steps/back stay 48mm / 48mm	Transport dimensions 2.060 mm x 490 mm x 120 mm	Tray Plastic	Tread depth 80 mm	Type rung/tread serrated
Vertical ladder height 1.86 m	Warranty 10 years	Weight 8 kg	Working height 3.25 m	certification-mark-pf TÜV-SÜD