
ZARGES

DATA SHEET

MultiTower S-PLUS 1T, 2,50 m - 52306

The mobile scaffolding solution for quick and safe erection due to advanced guardrails, two-metre platform spacing and fewer individual parts.



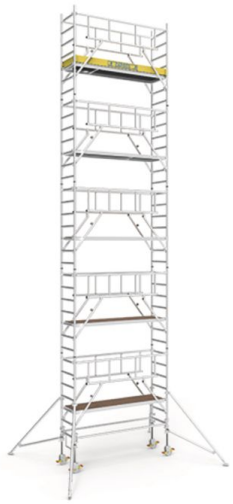











PRODUCT DESCRIPTION

- The mobile scaffolding solution for quick and safe erection due to advanced guardrails, two-metre platform spacing and fewer individual parts.
- Scaffolding width: 0.75 m; scaffolding length: 2.50 m.
- Safe and quick assembly and dismantling due to advanced guardrail (instead of railings and diagonal braces) and platforms at intervals of 2 m.
- Working heights ranging from 3.40 m to a maximum of 13.20 m can be achieved using standard components.
- Scaffolding Group 3 (strength up to 200 kg/m²) in accordance with DIN EN 1004-1.
- Standard castors: height-adjustable 200 mm swivel castors (Order No. 42917) for millimetre-perfect level adjustment.

HINTS AND SPECIAL FEATURES

By adding the relevant S-PLUS single parts, this safer configuration can also be retrofitted to standard mobile scaffold towers with triangular stabilisers.

PRODUCT FEATURES

Property	Value
Claw type	automatic
Height-adjustable castors:	Yes

Property	Value
Overall height	10.45 m
Platform height	9.2 m
Platform length	2.5 m
Platform length	2.5 m
Platform size	0,6m × 2,5m
Platform width	0.6 m
Rung diameter	50 mm
Scaffolding class	3 (= 200 kg/m²)
Standards	EN 1004-1
Stile diameter	50 mm
Transport dimensions	2.800 mm × 900 mm × 1.200 mm
Warranty	10 years
Weight	328.1 kg
Wheel diameter	200 mm
Width scaffolding	0.75 m
Working height	11.2 m

ACCESSORIES AND SPARE PARTS

SPARE PARTS 1



Spring clip for scaffolding
SKU 800172

ZARGES GMBH
Zargesstraße 7
82362 Weilheim

Tel: +49 (0)881-687-100
Fax: +49 (0)881-687-500
zarges@zarges.de

www.zarges.com
Effective 11/10/2026
Subject to change or error.