


MultiTower S-PLUS 2T, 1,80

m - 52495

Maximum working area, safe and quick erection through advanced guardrail, low platform spacing and fewer single parts.

Product description

- Maximum working area, safe and quick erection through advanced guardrail, low platform spacing and fewer single parts.
- Safe and quick assembly and dismantling due to advanced guardrail (instead of railings and diagonal braces) and platforms at intervals of 2 m.
- Scaffolding width: 1.35 m; scaffolding length: 1.80 m.
- Working heights ranging from 3.40 m to a maximum of 13.20 m can be achieved using standard components.
- Scaffolding Group 3 (strength up to 200 kg/m²) in accordance with DIN EN 1004-1.
- Standard castors: height-adjustable 200 mm swivel castors (Order No. 42917) for millimetre-perfect level adjustment.

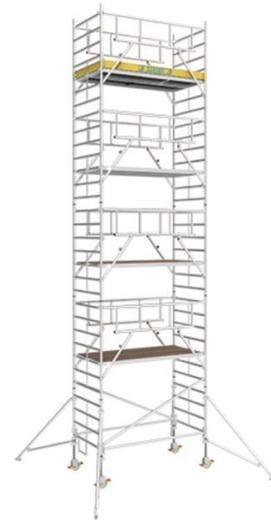

Hints and special features

By adding the relevant S-PLUS single parts, this safer configuration can also be retrofitted to standard mobile scaffold towers with triangular stabilisers.

Product features



| | |
|----------------------------|--------------------------------|
| Claw type | automatic |
| Height-adjustable castors: | Yes |
| Overall height | 9.65 m |
| Platform height | 8.4 m |
| Platform length | 1.8 m |
| Platform length | 1.8 m |
| Platform size | 1,2m × 1,8m |
| Platform width | 1.2 m |
| Rung diameter | 50 mm |
| Scaffolding class | 3 (= 200 kg/m ²) |
| Standards | EN 1004-1 |
| Stile diameter | 50 mm |
| Transport dimensions | 2.100 mm × 1.500 mm × 1.100 mm |
| Warranty | 10 years |
| Weight | 300.5 kg |
| Wheel diameter | 200 mm |
| Width scaffolding | 1.35 m |
| Working height | 10.4 m |

ZARGES GmbH

Zargesstraße 7

82362 Weilheim

Tel: +49 (0)881-687-100

Fax: +49 (0)881-687-500

zarges@zarges.de

www.zarges.com

Effective 5/13/2026

Subject to change or error.