


# MultiTower S-PLUS 2T, 1,80 m - 52525

Maximum working area, safe and quick erection through advanced guardrail, low platform spacing and fewer single parts.

## Product description

- Maximum working area, safe and quick erection through advanced guardrail, low platform spacing and fewer single parts.
- Safe and quick assembly and dismantling due to advanced guardrail (instead of railings and diagonal braces) and platforms at intervals of 2 m.
- Scaffolding width: 1.35 m; scaffolding length: 1.80 m.
- Working heights ranging from 3.40 m to a maximum of 13.20 m can be achieved using standard components.
- Scaffolding Group 3 (strength up to 200 kg/m<sup>2</sup>) in accordance with DIN EN 1004-1.
- Standard castors: height-adjustable 200 mm swivel castors (Order No. 42917) for millimetre-perfect level adjustment.

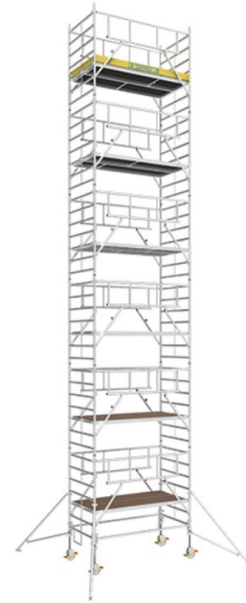

## Hints and special features

By adding the relevant S-PLUS single parts, this safer configuration can also be retrofitted to standard mobile scaffold towers with triangular stabilisers.

## Product features



|                            |                                |
|----------------------------|--------------------------------|
| Claw type                  | automatic                      |
| Height-adjustable castors: | Yes                            |
| Overall height             | 12.45 m                        |
| Platform height            | 11.2 m                         |
| Platform length            | 1.8 m                          |
| Platform length            | 1.8 m                          |
| Platform size              | 1,2m × 1,8m                    |
| Platform width             | 1.2 m                          |
| Rung diameter              | 50 mm                          |
| Scaffolding class          | 3 (= 200 kg/m <sup>2</sup> )   |
| Standards                  | EN 1004-1                      |
| Stile diameter             | 50 mm                          |
| Transport dimensions       | 2.100 mm × 1.500 mm × 1.400 mm |
| Warranty                   | 10 years                       |
| Weight                     | 397.9 kg                       |
| Wheel diameter             | 200 mm                         |
| Width scaffolding          | 1.35 m                         |
| Working height             | 13.2 m                         |

ZARGES GmbH

Zargesstraße 7

82362 Weilheim

Tel: +49 (0)881-687-100

Fax: +49 (0)881-687-500

zarges@zarges.de

[www.zarges.com](http://www.zarges.com)

Effective 6/27/2026

Subject to change or error.