
ZARGES

DATA SHEET

CompactMaster S-PLUS 1T - 53101

The top-selling folding scaffold unit is now available with advanced guardrail and two metre platform distance for safe and fast erection.



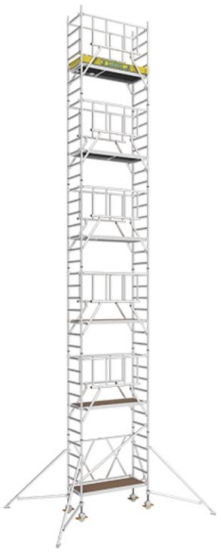







PRODUCT DESCRIPTION

- The top-selling folding scaffold unit is now available with advanced guardrail and two metre platform distance for safe and fast erection.
- Basic module folds together for rapid erection and dismantling.
- Scaffolding width: 0.85 m (to the outside edge of folding unit hinge); scaffolding length: 1.80 m.
- Working heights can be extended from 3.75 m to max. 13.55 m with standard parts.
- Scaffolding Group 3 (strength up to 200 kg/m²) in accordance with DIN EN 1004-1.
- Standard casters: 150 mm swivel castors with height adjustment (order no. 42755) for precise height adjustment down to the millimeter.

PRODUCT FEATURES

Property	Value
Claw type	automatic
Height-adjustable castors:	Yes
Overall height	11.7 m
Platform height	10.4 m
Platform length	1.8 m

Property	Value
Platform length	1.8 m
Platform size	0,6m × 1,8m
Platform width	0.6 m
Rung diameter	50 mm
Scaffolding class	3 (= 200 kg/m²)
Standards	EN 1004-1
Stile diameter	50 mm
Transport dimensions	0 mm0 mm0 mm
Warranty	10 years
Weight	291.6 kg
Wheel diameter	150 mm
Width scaffolding	0.85 m
Working height	12.4 m

ACCESSORIES AND SPARE PARTS

SPARE PARTS 2



Automatic steel hinge
SKU 820688



Spring clip for scaffolding
SKU 800172

ZARGES GMBH
Zargesstraße 7
82362 Weilheim

Tel: +49 (0)881-687-100
Fax: +49 (0)881-687-500
zarges@zarges.de

www.zarges.com
Effective 11/9/2026
Subject to change or error.