


PaxTower S-PLUS 1T -

53524

The handy 1-click folding scaffold unit for discerning skilled workers, featuring the S-PLUS railing for greater safety during assembly and disassembly.

Product description

- Safer and quicker assembly and dismantling due to advanced guardrails and platforms at intervals of 2 m.
- One-piece fold out snap-frame with simple, one-handed lock and release operation, for quick and easy set up.
- Innovative toe board system with no clips – removes the need for toe board clips reducing the amount of loose components.
- Smooth slot-in spigots to prevent tilting when the end frames join together.
- Scaffolding length: 1.80 m; scaffolding width: 0.72 m.
- Scaffolding Category 3 (load capacity of up to 200 kg/m²) according to the new EN 1004.
- 125 mm swivel castors with brake; the castors can be fitted with castor adapters (order no. 42794) to allow for height adjustment.
- Stile and rung diameter 45 mm.

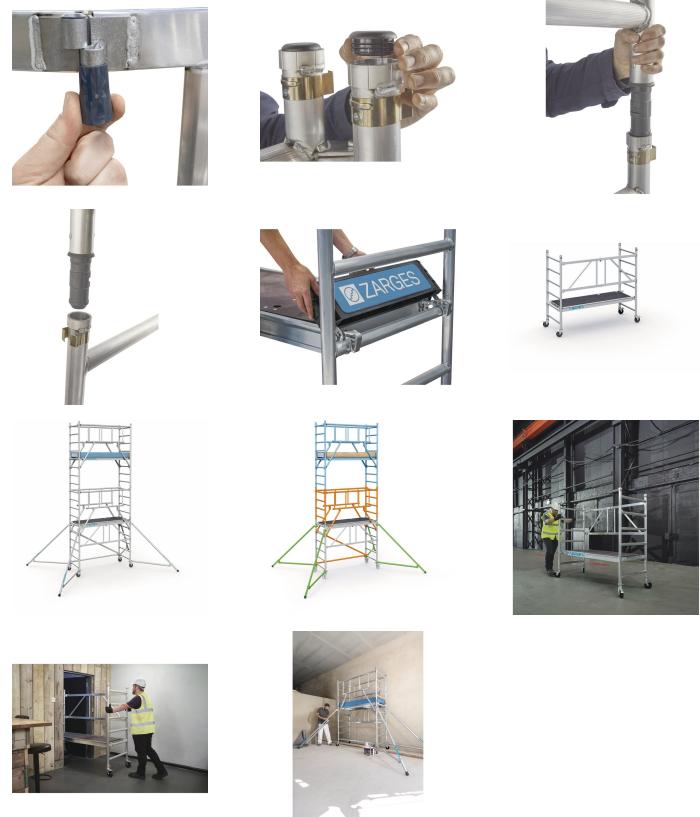

Product features

Claw type	Fits through doorways	Height-adjustable	Overall height	Platform height
-----------	-----------------------	-------------------	----------------	-----------------



automatic	Yes	castors: No	4.65 m	3.55 m
Platform length 1.8 m	Platform length 1.8 m	Platform size 0,6m x 1,8m	Platform width 0.6 m	Rung diameter 45 mm
Scaffolding class 3 (= 200 kg/m²)	Standards EN 1004-1	Stile diameter 45 mm	Transport dimensions 2.150 mm x 750 mm x 950 mm	Warranty 10 years
Weight 108 kg	Wheel diameter 125 mm	Width scaffolding 0.72 m	Working height 5.55 m	