


# PaxTower S-PLUS 1T -

## 53526

The handy 1-click folding scaffold unit for discerning skilled workers, featuring the S-PLUS railing for greater safety during assembly and disassembly.

### Product description

- Safer and quicker assembly and dismantling due to advanced guardrails and platforms at intervals of 2 m.
- One-piece fold out snap-frame with simple, one-handed lock and release operation, for quick and easy set up.
- Innovative toe board system with no clips – removes the need for toe board clips reducing the amount of loose components.
- Smooth slot-in spigots to prevent tilting when the end frames join together.
- Scaffolding length: 1.80 m; scaffolding width: 0.72 m.
- Scaffolding Category 3 (load capacity of up to 200 kg/m<sup>2</sup>) according to the new EN 1004.
- 125 mm swivel castors with brake; the castors can be fitted with castor adapters (order no. 42794) to allow for height adjustment.
- Stile and rung diameter 45 mm.

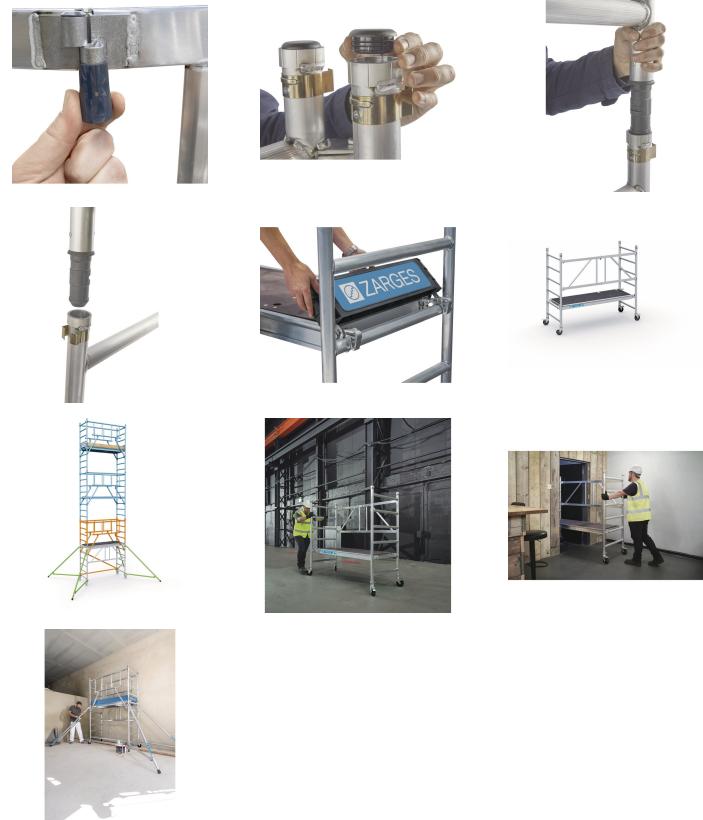

### Product features

Claw type	Fits through doorways	Height-adjustable	Overall height	Platform height
-----------	-----------------------	-------------------	----------------	-----------------



<b>automatic</b>	<b>Yes</b>	castors: <b>No</b>	<b>6.65 m</b>	<b>5.55 m</b>
Platform length <b>1.8 m</b>	Platform length <b>1.8 m</b>	Platform size <b>0,6m x 1,8m</b>	Platform width <b>0.6 m</b>	Rung diameter <b>45 mm</b>
Scaffolding class <b>3 (= 200 kg/m<sup>2</sup>)</b>	Standards <b>EN 1004-1</b>	Stile diameter <b>45 mm</b>	Transport dimensions <b>2.150 mm x 750 mm x 1.300 mm</b>	Warranty <b>10 years</b>
Weight <b>142.6 kg</b>	Wheel diameter <b>125 mm</b>	Width scaffolding <b>0.72 m</b>	Working height <b>7.55 m</b>	