

Comfortstep LH

These flexible ladders ensure safe access to shelving and can be adapted to the required height.

Product description

- These flexible ladders ensure safe access to shelving and can be adapted to the required height.
- The shelf-mounted ladders feature two hooks for anchor rails up to 36 mm in diameter, as well as additional hooks for vertical storage on the shelf.


Hints and special features

When ordering, please specify the vertical measurement from the floor to the top edge of the pipe rail!

Complies with EN 131 Professional.

Product features

Coating	anodised
Connection Stile-Rung	bolted
Load capacity	max. 150 kg
Material	Aluminium
Pitch rung/tread	250 mm
Standards	EN 131 professional
Tread depth	80 mm
Type rung/tread	padding on front tread edges
Warranty	10 years

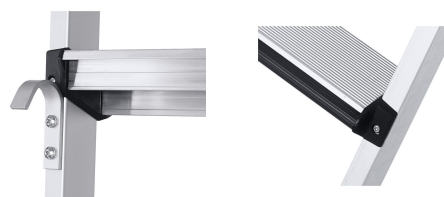

Product variants

	41402	41403	41404	41405	41406
Height hook on vertical	=1,45m - =1,69 m	=1,7m - =1,94 m	=1,95m - =2,19 m	=2,2m - =2,44 m	=2,45m - =2,69 m
Max height hook on vertical	1.69 m	1.94 m	2.19 m	2.44 m	2.69 m
Min height hook on vertical	1.45 m	1.7 m	1.95 m	2.2 m	2.45 m
Number of treads	6	7	8	9	10
Transport dimensions	1.660 mm × 380 mm × 100 mm	1.900 mm × 380 mm × 100 mm	2.140 mm × 380 mm × 100 mm	2.380 mm × 380 mm × 140 mm	2.300 mm × 380 mm × 150 mm
Weight	4.5 kg	5.2 kg	5.9 kg	6.6 kg	7.3 kg
Working height	2.75 m	3 m	3.25 m	3.5 m	3.75 m

ZARGES GmbH

Zargesstraße 7

82362 Weilheim

Tel: +49 (0)881-687-100

Fax: +49 (0)881-687-500

zarges@zarges.de

www.zarges.com

Effective 6/28/2026

Subject to change or error.