


# Comfortstep S

More than just shin protection: padded front edges and the widest platform in its class make even longer sessions significantly more comfortable.

## Product description

- More than just shin protection: padded front edges and the widest platform in its class make even longer sessions significantly more comfortable.
- The widest platform in its class, featuring a padded front edge for a secure, comfortable stance even during extended use.
- Deep treads with padded front edge for standing comfort.
- Non-slip two-component ladder feet with a large contact surface.
- 80 mm deep treads with a padded front edge protect the shins.
- Clean hands thanks to wear-resistant anodised stiles.
- Spacious aluminum storage tray with plenty of room for tools and small parts.
- 4 treads and up: High-strength polyester webbing with sewn-in attachment tabs – durable and resistant to wear and tear.
- Sturdy design for daily use: platform and profiles made of extruded aluminum.
- Screwed connection between treads and stile.

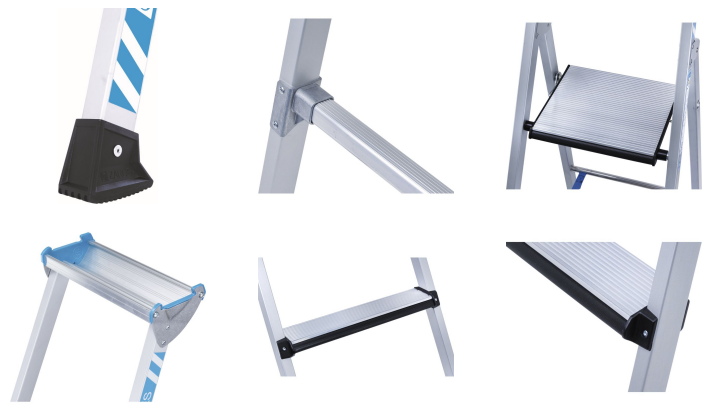

## Hints and special features

Complies with EN 131 Professional.

## Product features

Certification	TÜV-SÜD
Coating	anodised
Connection Stile-Rung	bolted
Load capacity	max. 150 kg
Material	Aluminium
Pitch rung/tread	250 mm
Platform length	250 mm
Platform width	300 mm
Standards	EN 131 professional
Stile depth	42 mm
Tray	Aluminium
Tread depth	80 mm
Type rung/tread	padding on front tread edges
Warranty	10 years

## Product variants

	41421	41422	41423	41424	41425	41426
Anti splay	–	Belt strap	Belt strap	Belt strap	Belt strap	Belt strap
Base	0,75 m × 0,5 m	0,92 m × 0,53 m	1,09 m × 0,56 m	1,26 m × 0,59 m	1,43 m × 0,62 m	1,6 m × 0,65 m
Number of rungs, incl. platform	3	4	5	6	7	8
Overall base width	0.5 m	0.53 m	0.56 m	0.59 m	0.62 m	0.65 m
Overall length	1.56 m	1.83 m	2.1 m	2.37 m	2.64 m	2.91 m

	41421	41422	41423	41424	41425	41426
Platform height	0.74 m	0.99 m	1.24 m	1.49 m	1.74 m	1.99 m
Stile depth	42 mm	42 mm	42 mm	48 mm	48 mm	48 mm
Stile depth steps/back stay	42mm / 42mm	42mm / 42mm	42mm / 42mm	48mm / 42mm	48mm / 42mm	48mm / 42mm
Transport dimensions	approx. 1.560 mm × 500 mm × 150 mm	approx. 1.830 mm × 530 mm × 150 mm	approx. 2.100 mm × 560 mm × 150 mm	approx. 2.370 mm × 590 mm × approx. 155 mm	approx. 2.640 mm × approx. 620 mm × approx. 155 mm	approx. 2.910 mm × approx. 645 mm × approx. 155 mm
Vertical ladder height	1.42 m	1.67 m	1.92 m	2.17 m	2.42 m	2.67 m
Weight	6.4 kg	7.4 kg	8.4 kg	9.7 kg	10.7 kg	11.9 kg
Working height	2.75 m	3 m	3.25 m	3.5 m	3.75 m	4 m

	41427
Anti splay	Belt strap
Base	1,94 m × 0,7 m
Number of rungs, incl. platform	10
Overall base width	0.7 m
Overall length	3.45 m
Platform height	2.49 m
Stile depth	48 mm
Stile depth steps/back stay	48mm / 42mm
Transport dimensions	approx. 3.450 mm × 700 mm × approx. 155 mm
Vertical ladder height	3.17 m
Weight	14.4 kg
Working height	4.5 m



ZARGES

ZARGES GmbH

Zargesstraße 7

82362 Weilheim

Tel: +49 (0)881-687-100

Fax: +49 (0)881-687-500

[zarges@zarges.de](mailto:zarges@zarges.de)

[www.zarges.com](http://www.zarges.com)

Effective 6/29/2026

Subject to change or error.