


Scana S

The lightweight, anodised entry-level model for short, occasional use.

Product description

- The lightweight, anodised entry-level model for short, occasional use.
- Spacious platform for a comfortable standing position.
- Tools and small parts are always within reach thanks to the handy storage tray.
- Clean hands thanks to wear-resistant anodised stiles.
- Easy to get on and off the bus thanks to the 80-mm-deep treads.
- 6 treads and up: High-strength polyester webbing with sewn-in attachment loop – durable and low-wear.
- Optimal platform stability thanks to a sturdy extruded profile.

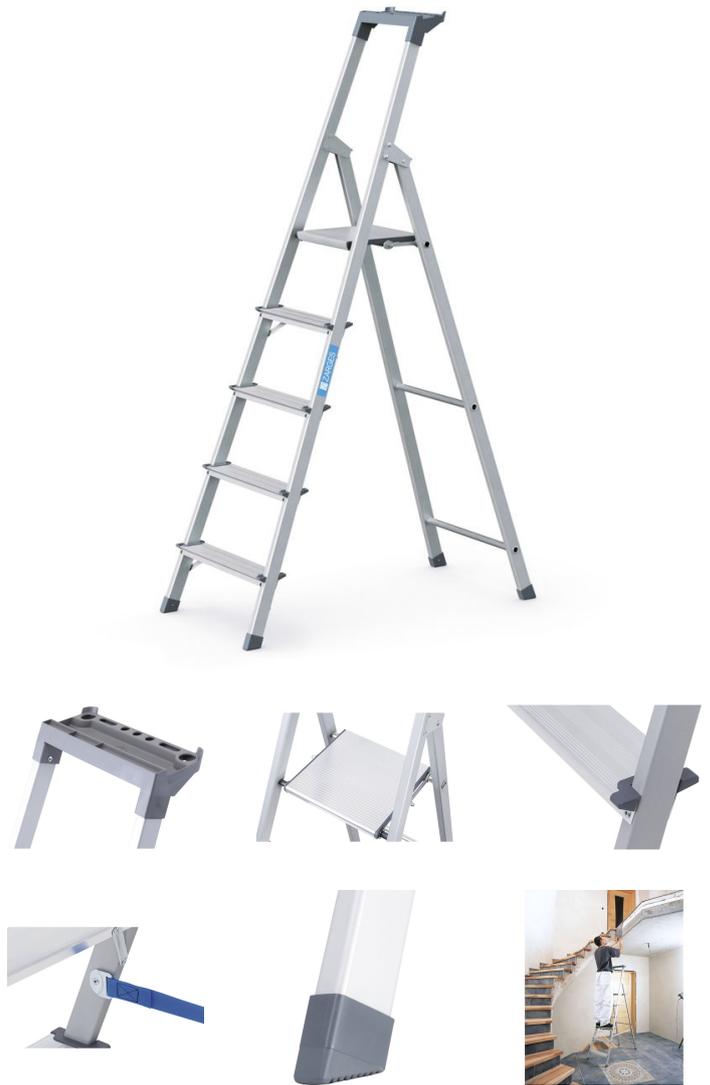

Hints and special features

Complies with EN 131 Professional.

Product features

Certification	TÜV-SÜD
Coating	anodised
Connection Stile-Rung	riveted
Load capacity	max. 150 kg

Material	Aluminium
Pitch rung/tread	216 mm
Platform length	250 mm
Platform width	250 mm
Standards	EN 131 professional
Stile depth	40 mm
Stile depth	40 mm
Stile depth steps/back stay	40mm / 40mm
Tray	Plastic
Tread depth	80 mm
Type rung/tread	serrated
Warranty	10 years

Product variants

	44153	44154	44155	44156	44157	44158
Anti splay	-	-	-	Belt strap	Belt strap	Belt strap
Base	0,67 m × 0,41 m	0,82 m × 0,43 m	0,96 m × 0,46 m	1,1 m × 0,48 m	1,25 m × 0,51 m	1,7 m × 0,53 m
Number of rungs, incl. platform	3	4	5	6	7	8
Overall base width	0.41 m	0.43 m	0.46 m	0.48 m	0.51 m	0.53 m
Overall length	1.36 m	1.59 m	1.82 m	2.05 m	2.29 m	2.52 m
Platform height	0.59 m	0.81 m	1.03 m	1.24 m	1.47 m	1.7 m
Transport dimensions	1.370 mm × 410 mm × 110 mm	1.600 mm × 440 mm × 110 mm	1.830 mm × 460 mm × 110 mm	2.060 mm × 490 mm × 110 mm	2.290 mm × 510 mm × 110 mm	2.520 mm × 530 mm × 110 mm
Vertical ladder height	1.2 m	1.42 m	1.64 m	1.85 m	2.08 m	2.31 m



	44153	44154	44155	44156	44157	44158
Weight	3.7 kg	4.4 kg	5.1 kg	5.9 kg	6.6 kg	8 kg
Working height	2.6 m	2.8 m	3 m	3.25 m	3.5 m	3.7 m

ZARGES GmbH

Zargesstraße 7

82362 Weilheim

Tel: +49 (0)881-687-100

Fax: +49 (0)881-687-500

zarges@zarges.de

www.zarges.com

Effective 5/14/2026

Subject to change or error.