




Access steps with landing - 40155412

Stationary access to buildings and machines with platforms.

Product description

- Different angles of inclination: 45° for comfortable access, 60° for confined spaces.
- Selection of tread widths 600 mm, 800 mm or 1000 mm.
- Treads and platform surfaces are made of grooved aluminum (R10) as standard.
- Stationary access to buildings and machines.
- Individually adjustable platform lengths.
- Support section mounting element for use as a free-standing work platform.
- Customised guardrail configuration on the platform, with optional swing door or pole barrier.
- Maximum flexibility with optional handrails and guardrails which can be removed without tools.
- Stiles made from high-strength aluminium extrusions with screw channels for flexible assembly options.
- Quick and simple assembly with the ZARGES connection system with a high level of pre-assembly.

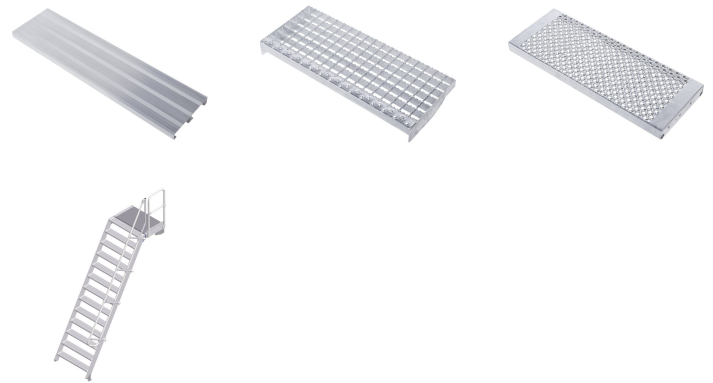

Hints and special features

We recommend equipping the product in accordance with the German Equipment and Product Safety Act



(ProdSG) with two-sided handrails and, for steps with platforms or maintenance platforms, all-round fall protection (e.g. guardrails). If handrails or guardrails are not desired, the operator must ensure sufficient regulatory protection.

Design your custom staircase at www.zargeskonfigurator.de. Can't find the solution you're looking for? Contact our expert advisors! We can handle even the most challenging requirements!

Tel.: +49 881 687-101

Standard applied: DIN EN ISO 14 122.

Product features

Inclination	60 °
Load capacity	max. 300 kg
Max. load per tread	150 kg
Number of treads	13
Overall span	2561 mm
Platform length	600 mm
Standards	NF EN ISO 14122-4
Tread width	1000 mm
Vertical height	3250 mm
Warranty	10 years

ZARGES (U.K.) Ltd.

8 Holdom Avenue. Saxon Park Ind. Est.

Bletchley MK1 1QU

Tel: 01908 641118

Fax:
sales@zarges.co.uk

www.zarges.com/uk

Effective 13/5/2026
 Subject to change or error.