
DATA SHEET

Access steps with landing - 40155476

Stationary access to buildings and machines with platforms.

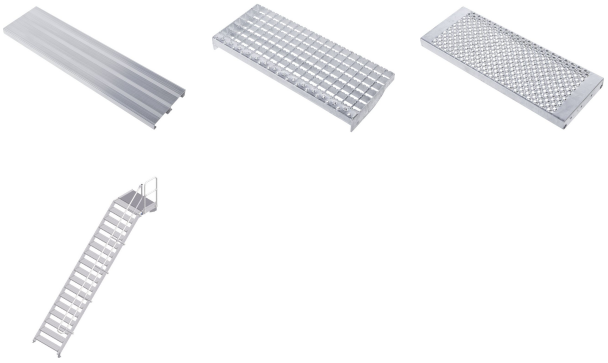

PRODUCT DESCRIPTION

- Different angles of inclination: 45° for comfortable access, 60° for confined spaces.
- Selection of tread widths 600 mm, 800 mm or 1000 mm.
- Treads and platform surfaces are made of grooved aluminum (R10) as standard.
- Stationary access to buildings and machines.
- Individually adjustable platform lengths.
- Support section mounting element for use as a free-standing work platform.
- Customised guardrail configuration on the platform, with optional swing door or pole barrier.
- Maximum flexibility with optional handrails and guardrails which can be removed without tools.
- Stiles made from high-strength aluminium extrusions with screw channels for flexible assembly options.
- Quick and simple assembly with the ZARGES connection system with a high level of pre-assembly.

HINTS AND SPECIAL FEATURES

We recommend equipping the product in accordance with the German Equipment and Product Safety Act (ProdSG) with two-sided handrails and, for steps with platforms or maintenance platforms, all-round fall protection (e.g. guardrails). If handrails or guardrails are not desired, the operator must ensure sufficient regulatory protection.
Standard applied: DIN EN ISO 14 122.

PRODUCT FEATURES

Property	Value

Property	Value
Inclination	45 °
Load capacity	max. 300 kg
Max. load per tread	150 kg
Number of treads	17
Overall span	4311 mm
Platform length	600 mm
Standards	NF EN ISO 14122-4
Tread width	1000 mm
Vertical height	3650 mm
Warranty	10 years

ACCESSORIES AND SPARE PARTS

ACCESSORIES 5

clamping lever
SKU 42355279

clamping lever
SKU 42355276



Handrail, 17 steps
SKU 42355316



Platform railing
SKU 42355844



Platform railing
SKU 42355896

SPARE PARTS 1

clamping lever
SKU 800512

ZARGES (U.K.) LTD.
Blackwater Trading Estate,
The Causeway
CM9 4LJ Maldon, Essex

Tel: 01908 641118
sales@zarges.co.uk

www.zarges.com/uk
Effective 11/11/2026
Subject to change or error.