
DATA SHEET

Access steps with landing - 40155478

Stationary access to buildings and machines with platforms.

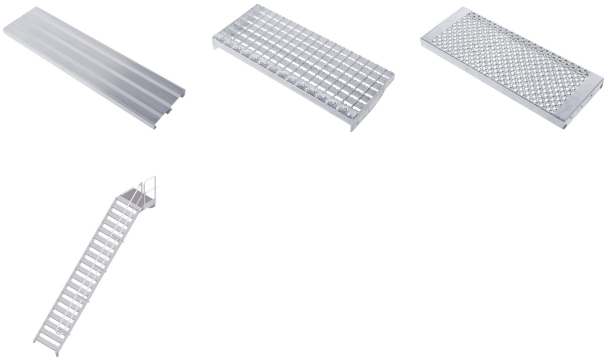

PRODUCT DESCRIPTION

- Different angles of inclination: 45° for comfortable access, 60° for confined spaces.
- Selection of tread widths 600 mm, 800 mm or 1000 mm.
- Treads and platform surfaces are made of grooved aluminum (R10) as standard.
- Stationary access to buildings and machines.
- Individually adjustable platform lengths.
- Support section mounting element for use as a free-standing work platform.
- Customised guardrail configuration on the platform, with optional swing door or pole barrier.
- Maximum flexibility with optional handrails and guardrails which can be removed without tools.
- Stiles made from high-strength aluminium extrusions with screw channels for flexible assembly options.
- Quick and simple assembly with the ZARGES connection system with a high level of pre-assembly.

HINTS AND SPECIAL FEATURES

We recommend equipping the product in accordance with the German Equipment and Product Safety Act (ProdSG) with two-sided handrails and, for steps with platforms or maintenance platforms, all-round fall protection (e.g. guardrails). If handrails or guardrails are not desired, the operator must ensure sufficient regulatory protection.
Standard applied: DIN EN ISO 14 122.

PRODUCT FEATURES

Property	Value

Property	Value
Inclination	45 °
Load capacity	max. 300 kg
Max. load per tread	150 kg
Number of treads	19
Overall span	4741 mm
Platform length	600 mm
Standards	NF EN ISO 14122-4
Tread width	1000 mm
Vertical height	4080 mm
Warranty	10 years

ACCESSORIES AND SPARE PARTS

ACCESSORIES 5

clamping lever
SKU 42355279

clamping lever
SKU 42355276



Handrail, 19 steps
SKU 42355318



Platform railing
SKU 42355844



Platform railing
SKU 42355896

ZARGES (U.K.) LTD.
Blackwater Trading Estate,
The Causeway
CM9 4LJ Maldon, Essex

Tel: 01908 641118
sales@zarges.co.uk

www.zarges.com/uk
Effective 11/11/2026
Subject to change or error.