




# XLstep S - 41223

Light weight and easy to handle, as well as great value.

## Product description

- Light weight and easy to handle, as well as great value.
- Stand without fatigue on deep treads.
- Large platform that allows personnel to stand safely and comfortably even when working for extended periods.
- Stand without fatigue on 80 mm deep treads.
- Wear-resistant, anodised stiles.
- Platform made from extruded aluminium (300 mm × 250 mm) for safe and comfortable standing even when working for longer periods of time.
- Spacious aluminium storage tray for material and tools.
- Triple-riveted connection between rung and stile.
- Non-slip plastic end caps.
- Treads and stiles made from extruded aluminium sections.

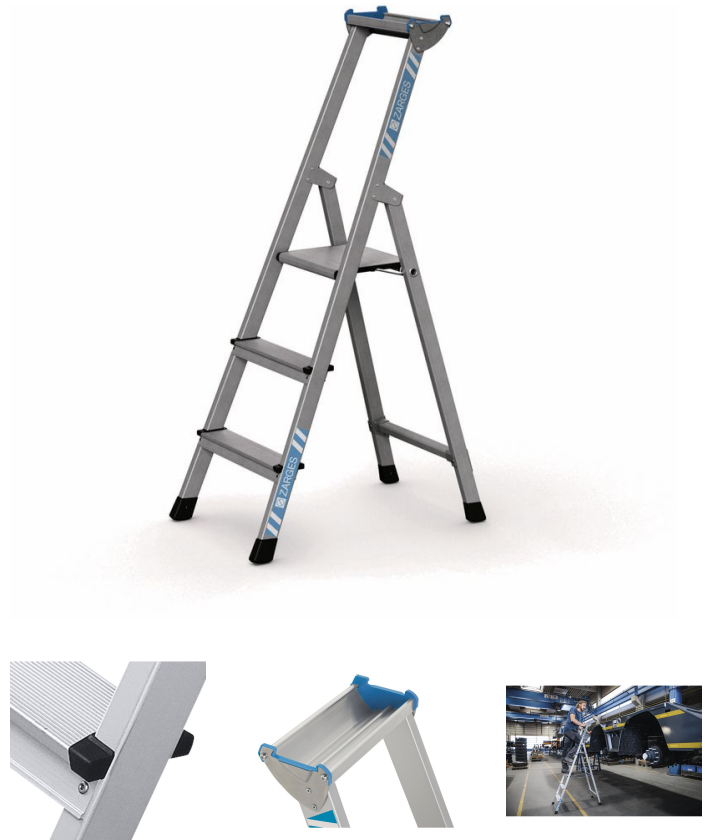

## Hints and special features

Complies with EN 131 Professional.

## Product features

Base	Coating	Connection between stiles and rungs/stiles	Load capacity	Material
------	---------	--	---------------	----------



<b>0,74 m × 0,49 m</b>	<b>anodised</b>	<b>riveted</b>	<b>max. 150 kg</b>	<b>aluminium</b>
Number of rungs, incl. platform <b>3</b>	Overall base width <b>0.49 m</b>	Overall length <b>1.56 m</b>	Platform height <b>0.74 m</b>	Platform length <b>250 mm</b>
Platform width <b>300 mm</b>	Standards <b>EN 131 professional</b>	Stile depth <b>42 mm</b>	Stile depth <b>42 mm</b>	Stile depth steps/back stay <b>42mm / 42mm</b>
Storage tray <b>aluminium</b>	Transport dimensions <b>approx. 1.560 mm × approx. 490 mm × approx. 155 mm</b>	Tread depth <b>80 mm</b>	Type of rungs/treads <b>serrated</b>	Vertical distance between each rung/tread <b>250 mm</b>
Vertical ladder height <b>1.42 m</b>	Warranty <b>10 years</b>	Weight <b>6 kg</b>	Working height <b>2.75 m</b>	certification-mark-pf <b>TÜV-SÜD</b>