




## ZAP Telemaster S - 41325

Secure and flexible: height adjustable platform with all-round railing for stability, easy to adjust with compact closed dimensions.

### Product description

- Height-adjustable platform with large standing surface and all-round railings for safe and comfortable footing.
- Simple height adjustment according to the push-up ladder principle, thus different heights can be obtained with only one platform ladder.
- Very easy to erect - handrails and guardrails unfold automatically during erection.
- Can be used on stairs and folded to a very compact size for transport and storage.
- The two rear wheels make it easy to move.
- Large standing surface, 665 x 440 mm, made of 7-ply adhesive-bonded plywood board, with guardrail and knee bar, ensures maximum work safety and comfortable standing.
- Complies with new European standard DIN EN 131-7.
- Can be easily moved even when fully set up thanks to pair of wheels.
- Compact dimensions when folded, therefore easy to transport and store.
- High strength, non-twist rung/stile connections.
- Replaceable 2-component plastic end caps ensure positioning without risk of slipping.
- Can be used on steps/stairs.

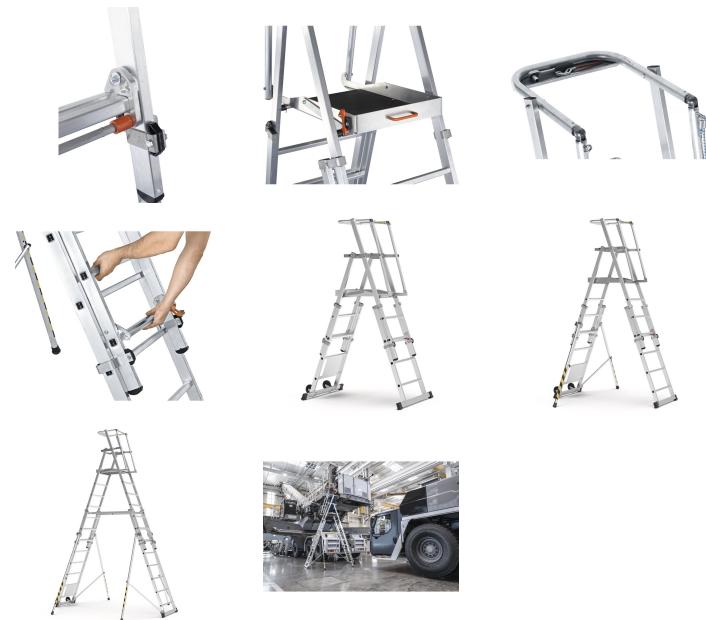



**ZARGES**

More information about the product, accessories and spare parts:

<https://www.zarges.com/uk/products/zap-telemaster-s-41325>



- Order No. 41325 without stabiliser.
- Required number of ballast weights when used outdoors: 4x (order no. 41331).

## Product features

Footpoint, stabiliser rod extended L x W <b>1,45m × 1 m</b>	Footpoint, stabiliser rod retracted L x W <b>1,45m × 1 m</b>	Guardrail height <b>1 m</b>	Height including railing <b>max. 2.37 m</b>	Length <b>0.4 m</b>
Load capacity <b>max. 150 kg</b>	No. of rungs incl. platform <b>5</b>	Platform height <b>0,81m / 1,08m / 1,34m</b>	Platform length <b>665 mm</b>	Platform material <b>7-layer laminated plywood</b>
Platform width <b>440 mm</b>	Standards <b>EN 131-7</b>	Storage tray <b>aluminium</b>	Transport dimensions <b>2.160 mm × 1.020 mm × 400 mm</b>	Tread depth <b>30 mm</b>
Warranty <b>10 years</b>	Weight <b>28 kg</b>	Width <b>2.16 m</b>	Width, extended <b>1 m</b>	Width, retracted <b>1 m</b>
Working height <b>3.34 m</b>	closed length <b>1.45 m</b>	extended length <b>1.45 m</b>		