




## ZAP Safemaster S - 41678

The flanged platform ladder can now be retrofitted with triangular stabilisers to comply with EN 131-7.

### Product description

- The flanged platform ladder can now be retrofitted with triangular stabilisers to comply with EN 131-7.
- Optimal stability thanks to a rigid connection on both sides with pressure reinforcement.
- Foldable anodised handrails allow it to take up less space during transport.
- The handle on the platform allows the ladder to be folded up quickly and effortlessly.
- Aluminum work platform, approx. 400 x 400 mm, with three-sided safety railing (height 1,000 mm).
- Anodised handrails and guardrails.
- Generously sized storage tray for tools and small parts.
- 80 mm deep treads with ZARGES Safer Step Technology.
- Can be retrofitted with optional stabiliser sets to comply with EN 131, Part 7.

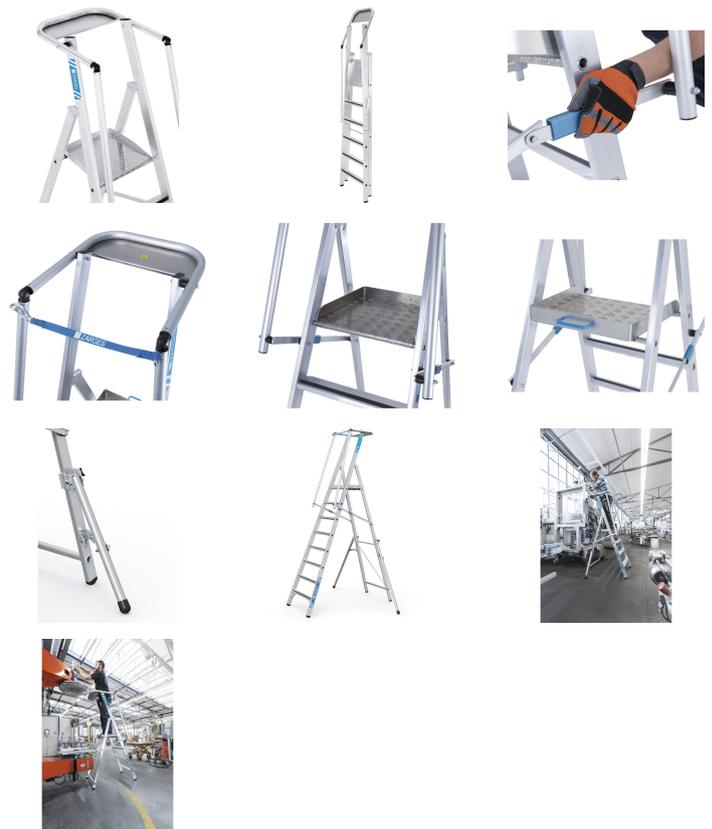

### Product features

Anti-splay mechanism

Rigid locking bar

Certification

TÜV-SÜD



Guardrail height	1000 mm
Height including railing	3.13 m
Load capacity	max. 150 kg
Number of rungs, incl. platform	8
Overall base width	0.77 m
Overall length	3.55 m
Platform height	2.11 m
Platform length	400 mm
Platform material	Aluminium ribbed plate
Platform width	400 mm
Standards	EN 131 professional
Stile depth	73 mm
Stile depth	58 mm
Stile depth steps/back stay	73mm / 58mm
Storage tray	aluminium
Transport dimensions	approx. 3.550 mm × 750 mm × 210 mm
Tread depth	80 mm
Type of rungs/treads	Safer Step
Warranty	10 years
Weight	19.1 kg
Working height	4.11 m



ZARGES (U.K.) Ltd.

8 Holdom Avenue, Saxon Park Ind. Est.  
Bletchley MK1 1QU

Tel: 01908 641118

Fax:  
[sales@zarges.co.uk](mailto:sales@zarges.co.uk)

[www.zarges.com/uk](http://www.zarges.com/uk)

Effective 14/5/2026  
Subject to change or error.