




Scana S

The lightweight, anodised entry-level model for short, occasional use.

Product description

- The lightweight, anodised entry-level model for short, occasional use.
- Spacious platform for a comfortable standing position.
- Tools and small parts are always within reach thanks to the handy storage tray.
- Clean hands thanks to wear-resistant anodised stiles.
- Easy to get on and off the bus thanks to the 80-mm-deep treads.
- 6 treads and up: High-strength polyester webbing with sewn-in attachment loop – durable and low-wear.
- Optimal platform stability thanks to a sturdy extruded profile.

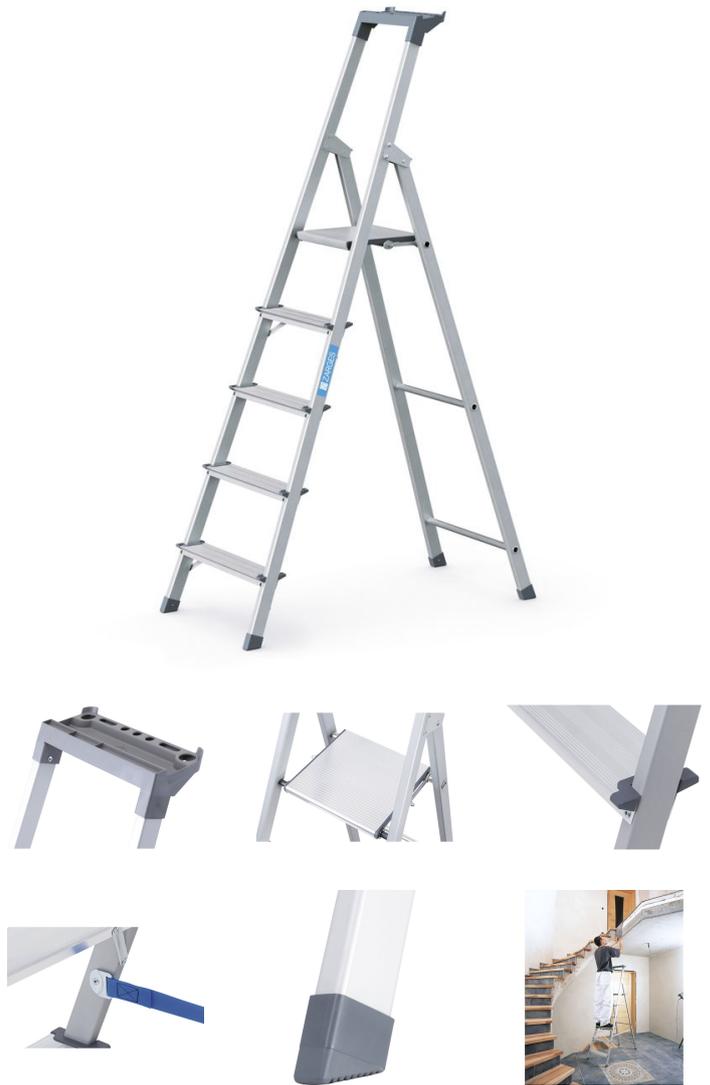

Hints and special features

Complies with EN 131 Professional.

Product features

Certification	TÜV-SÜD
Coating	anodised
Connection between stiles and rungs/stiles	riveted
Load capacity	max. 150 kg



Material	aluminium
Platform length	250 mm
Platform width	250 mm
Standards	EN 131 professional
Stile depth	40 mm
Stile depth	40 mm
Stile depth steps/back stay	40mm / 40mm
Storage tray	Plastic
Tread depth	80 mm
Type of rungs/treads	serrated
Vertical distance between each rung/tread	216 mm
Warranty	10 years

Product variants

	44153	44154	44155	44156	44157	44158
Anti-splay mechanism	-	-	-	Belt strap	Belt strap	Belt strap
Base	0,67 m × 0,41 m	0,82 m × 0,43 m	0,96 m × 0,46 m	1,1 m × 0,48 m	1,25 m × 0,51 m	1,7 m × 0,53 m
Number of rungs, incl. platform	3	4	5	6	7	8
Overall base width	0.41 m	0.43 m	0.46 m	0.48 m	0.51 m	0.53 m
Overall length	1.36 m	1.59 m	1.82 m	2.05 m	2.29 m	2.52 m
Platform height	0.59 m	0.81 m	1.03 m	1.24 m	1.47 m	1.7 m
Transport dimensions	1.370 mm × 410 mm × 110 mm	1.600 mm × 440 mm × 110 mm	1.830 mm × 460 mm × 110 mm	2.060 mm × 490 mm × 110 mm	2.290 mm × 510 mm × 110 mm	2.520 mm × 530 mm × 110 mm
Vertical ladder height	1.2 m	1.42 m	1.64 m	1.85 m	2.08 m	2.31 m



	44153	44154	44155	44156	44157	44158
Weight	3.7 kg	4.4 kg	5.1 kg	5.9 kg	6.6 kg	8 kg
Working height	2.6 m	2.8 m	3 m	3.25 m	3.5 m	3.7 m

ZARGES (U.K.) Ltd.

8 Holdom Avenue, Saxon Park Ind. Est.

Bletchley MK1 1QU

Tel: 01908 641118

Fax:

sales@zarges.co.uk

www.zarges.com/uk

Effective 13/5/2026

Subject to change or error.