




# Skymaster DX

Functionality and flexibility with standard features and excellent price/performance.

## Product description

- Functionality and flexibility with standard features and excellent price/performance.
- Upper ladder can also be used separately as single ladders for Order Nos. 44837-44840.
- Sturdy triangular rungs made from extruded profiles that have a horizontal stepping surface when in the use position.
- Anti-spread protection provided by high-strength polyester webbing with a sewn-in attachment tab.
- Stiles made from extruded aluminium sections for maximum stability.
- Replaceable 2-component plastic end caps ensure positioning without risk of slipping.
- High strength, non-twist rung/stile connections.
- Cannot be used on stairs.

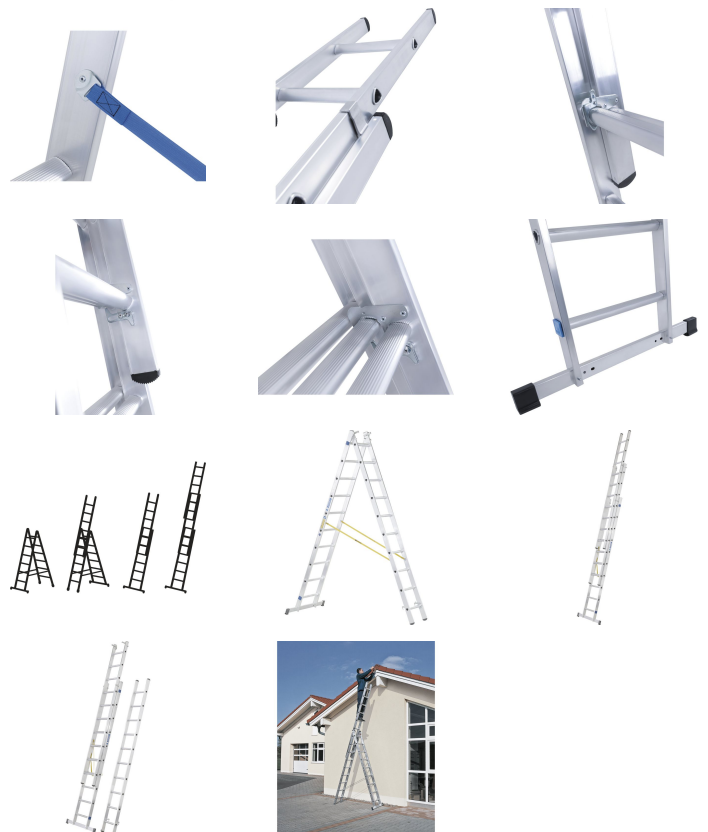

## Hints and special features

Complies with EN 131 Professional.

## Product features

Certification	TÜV-SÜD
Coating	natural



Connection between stiles and rungs/stiles	flanged
Load capacity	max. 150 kg
Material	aluminium
Standards	EN 131 professional
Tread depth	38 mm
Type of rungs/treads	serrated
Vertical distance between each rung/tread	265 mm
Warranty	10 years

## Product variants

	44837	44838	44839	44840	44841	44842
Ladder length as 3-part single ladder	4.4 m	5.25 m	6.1 m	6.65 m	7.2 m	8.3 m
Length as 2-part single ladder and as stepladder with push-on section	3.25 m	3.85 m	4.4 m	4.65 m	5.25 m	5.8 m
Number of rungs	3 × 7	3 × 8	3 × 9	3 × 10	3 × 11	3 × 12
Overall length, retracted	2.14 m	2.42 m	2.7 m	2.98 m	3.26 m	3.54 m
Stile depth	58 mm	68 mm	73 mm	73 mm	85 mm	85 mm
Transport dimensions	2.130 mm × 500 mm × 170 mm	2.410 mm × 500 mm × 170 mm	2.690 mm × 500 mm × 190 mm	2.970 mm × 500 mm × 190 mm	3.270 mm × 500 mm × 200 mm	3.550 mm × 500 mm × 220 mm
Weight	13.8 kg	16.3 kg	18 kg	20.5 kg	22.3 kg	25.9 kg
Wide crosspiece	0.8 m	0.9 m	1 m	1.1 m	1.1 m	1.2 m
Working height as 3-part single ladder	5.2 m	6 m	6.85 m	7.35 m	7.9 m	9 m



	44844
Ladder length as 3-part single ladder	9.45 m
Length as 2-part single ladder and as stepladder with push-on section	6.654 m
Number of rungs	3 × 14
Overall length, retracted	4.1 m
Stile depth	98 mm
Transport dimensions	4.110 mm × 500 mm × 220 mm
Weight	31.5 kg
Wide crosspiece	1.2 m
Working height as 3-part single ladder	10.05 m

ZARGES (U.K.) Ltd.

Blackwater Trading Estate, The Causeway  
 CM9 4LJ Maldon, Essex

Tel: 01908 641118

Fax:  
[sales@zarges.co.uk](mailto:sales@zarges.co.uk)

[www.zarges.com/uk](http://www.zarges.com/uk)

Effective 29/6/2026  
 Subject to change or error.