





# Stainless steel shaft covers with trough

Walkable or drivable shaft covers with choice of surface for indoor and outdoor use.

## Product description

- Compliant with DIN EN 124 in conjunction with DIN 1229.
- Tapered profile-section construction with multiple bolted joints.
- Easy to open, no jamming.
- Odour-tight and impervious to surface water.
- Load capacity for shaft cover with cover trough: test force 125 kN (= 12.5 t), only after the cover trough has been filled with B 45 concrete (grain 0-8).
- Incl. lift-out handles (pair) made from stainless steel, comprising one self-lifting opening handle and one lift-out handle.
- Trough depth 80 mm (of which 40 mm covered with construction steel grating and 40 mm free area)

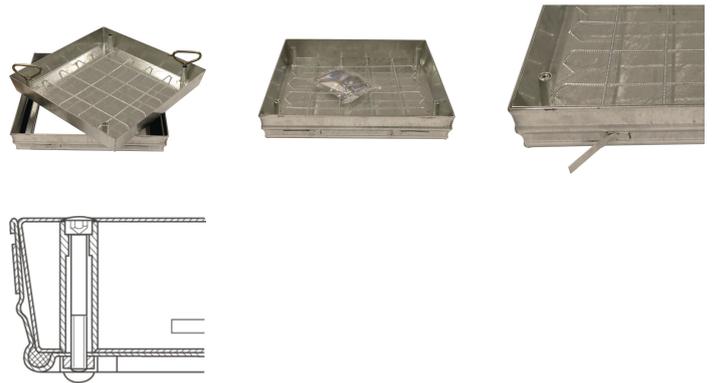

## Product features

Design height	90 mm
Trough depth	80 mm

## Product variants



	47060	47061	47062	47064	47065	47067
Inside shaft length	300 mm	450 mm	500 mm	600 mm	635 mm	800 mm
Inside shaft size	300mm x 300mm	450mm x 450mm	500mm x 500mm	600mm x 600mm	635mm x 635mm	800mm x 800mm
Inside shaft width	300 mm	450 mm	500 mm	600 mm	635 mm	800 mm
Outside dimensions max. L x W x H	420 mm x 420 mm	570 mm x 570 mm	620 mm x 620 mm	720 mm x 720 mm	755 mm x 755 mm	920 mm x 920 mm
Transport dimensions	420 mm x 420 mm x 90 mm	570 mm x 570 mm x 90 mm	620 mm x 620 mm x 90 mm	720 mm x 720 mm x 90 mm	750 mm x 750 mm x 90 mm	920 mm x 920 mm x 90 mm

	47070
Inside shaft length	1000 mm
Inside shaft size	1.000mm x 1.000mm
Inside shaft width	1000 mm
Outside dimensions max. L x W x H	1.120 mm x 1.120 mm
Transport dimensions	1.120 mm x 1.120 mm x 90 mm

ZARGES (U.K.) Ltd.

8 Holdom Avenue. Saxon Park Ind. Est.  
 Bletchley MK1 1QU

Tel: 01908 641118

Fax:  
[sales@zarges.co.uk](mailto:sales@zarges.co.uk)

[www.zarges.com/uk](http://www.zarges.com/uk)

Effective 1/4/2026  
 Subject to change or error.