





Stainless steel shaft covers with trough

Walkable or drivable shaft covers with choice of surface for indoor and outdoor use.

Product description

- Compliant with DIN EN 124 in conjunction with DIN 1229.
- Tapered profile-section construction with multiple bolted joints.
- Easy to open, no jamming.
- Odour-tight and impervious to surface water.
- Load capacity for shaft cover with cover trough: test force 125 kN (= 12.5 t), only after the cover trough has been filled with B 45 concrete (grain 0-8).
- Incl. lift-out handles (pair) made from stainless steel, comprising one self-lifting opening handle and one lift-out handle.
- Trough depth 80 mm (of which 40 mm covered with construction steel grating and 40 mm free area)

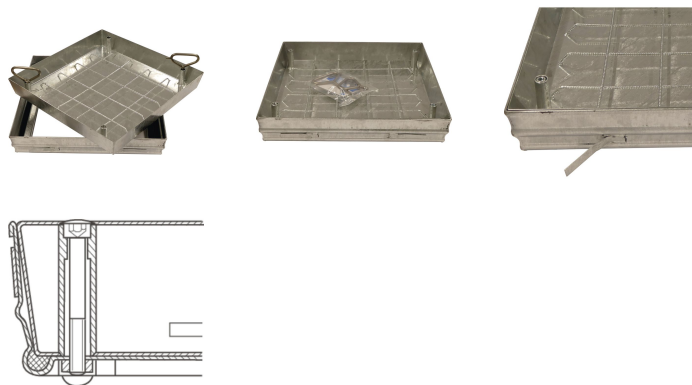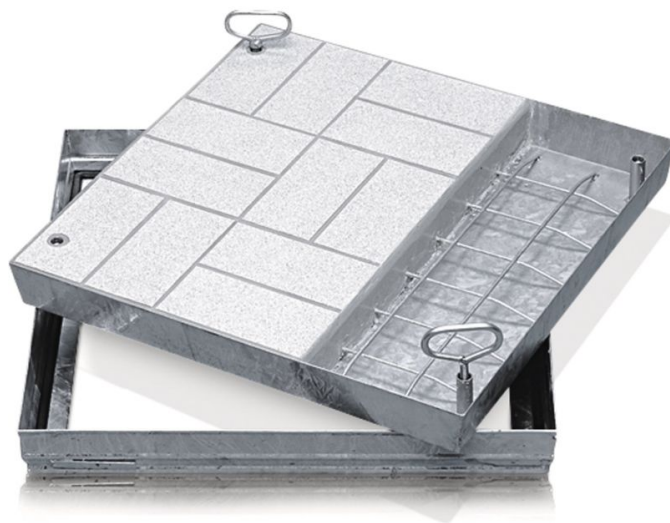


Product features

Design height
90 mm

Trough depth
80 mm

Product variants



SKU 47060	SKU 47061	SKU 47062
Inside shaft length 300 mm	Inside shaft length 450 mm	Inside shaft length 500 mm
Inside shaft size 300mm × 300mm	Inside shaft size 450mm × 450mm	Inside shaft size 500mm × 500mm
Inside shaft width 300 mm	Inside shaft width 450 mm	Inside shaft width 500 mm
Outside dimensions max. L x W x H 420 mm × 420 mm	Outside dimensions max. L x W x H 570 mm × 570 mm	Outside dimensions max. L x W x H 620 mm × 620 mm
Transport dimensions 420 mm × 420 mm × 90 mm	Transport dimensions 570 mm × 570 mm × 90 mm	Transport dimensions 620 mm × 620 mm × 90 mm
SKU 47064	SKU 47065	SKU 47067
Inside shaft length 600 mm	Inside shaft length 635 mm	Inside shaft length 800 mm
Inside shaft size 600mm × 600mm	Inside shaft size 635mm × 635mm	Inside shaft size 800mm × 800mm
Inside shaft width 600 mm	Inside shaft width 635 mm	Inside shaft width 800 mm
Outside dimensions max. L x W x H 720 mm × 720 mm	Outside dimensions max. L x W x H 755 mm × 755 mm	Outside dimensions max. L x W x H 920 mm × 920 mm
Transport dimensions 720 mm × 720 mm × 90 mm	Transport dimensions 750 mm × 750 mm × 90 mm	Transport dimensions 920 mm × 920 mm × 90 mm
SKU		



47070

Inside shaft length

1000 mm

Inside shaft size

1.000mm × 1.000mm

Inside shaft width

1000 mm

Outside dimensions max. L x W x H

1.120 mm × 1.120 mm

Transport dimensions

1.120 mm × 1.120 mm × 90 mm