



# Galvanised steel shaft covers with cover trough - 47032

Shaft covers that can be walked or driven on, with  
customisable inner and outer surface.

## Product description

- Compliant with DIN EN 124 in conjunction with DIN 1229.
- Tapering section design, therefore easy to open. No sticking.
- Easy to open, no jamming.
- Odour-tight and impervious to surface water.
- Load with choice of surface: test force 125 kN (=12.5 t), only after cover trough has been filled by customer with B 45 concrete (grain 0-8).
- Incl. lift-out handles (pair) made from stainless steel, comprising one self-lifting opening handle and one lift-out handle.
- Trough depth 80 mm (of which 40 mm covered with construction steel grating and 40 mm free area)

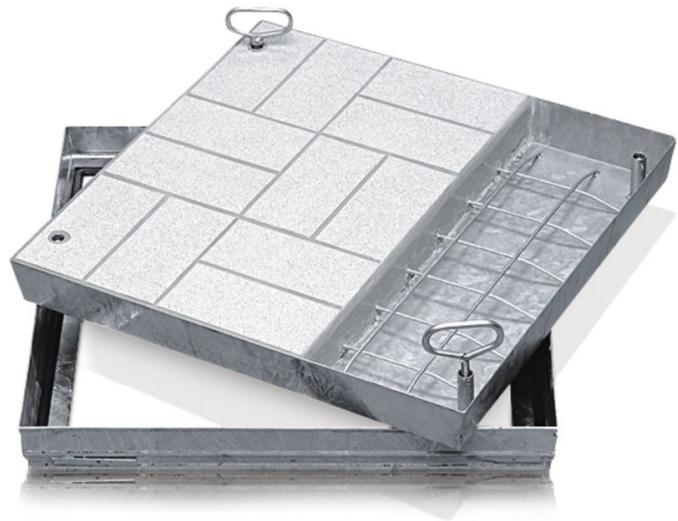

## Product features

Design height <b>90 mm</b>	Inside shaft length <b>600 mm</b>	Inside shaft size <b>600mm x 400mm</b>	Inside shaft width <b>400 mm</b>	Material, cover <b>Steel, galvanised</b>
Material, frame	Outside dimensions max. L x W x H	Transport dimensions	Trough depth	



ZARGES

Steel, galvanised

720 mm × 520 mm

720 mm × 520 mm ×  
70 mm

80 mm

ZARGES GmbH

Zargesstraße 7

82362 Weilheim

Tel: +49 (0)881-687-100

Fax: +49 (0)881-687-500

[www.zarges.com](http://www.zarges.com)

[zarges@zarges.de](mailto:zarges@zarges.de)

Effective  
2/12/2026

Subject to change or error.

2/2