





# Steel shaft covers, galvanised steel with trough - 47031

Walkable or drivable shaft covers with choice of surface for indoor and outdoor use.

## Product description

- Compliant with DIN EN 124 in conjunction with DIN 1229.
- Tapered profile-section construction with multiple bolted joints.
- Easy to open, no jamming.
- Odour-tight and impervious to surface water.
- Load capacity for shaft cover with cover trough: test force 125 kN (= 12.5 t), only after the cover trough has been filled with B 45 concrete (grain 0-8).
- Incl. lift-out handles (pair) made from stainless steel, comprising one self-lifting opening handle and one lift-out handle.
- Trough depth 80 mm (of which 40 mm covered with construction steel grating and 40 mm free area)

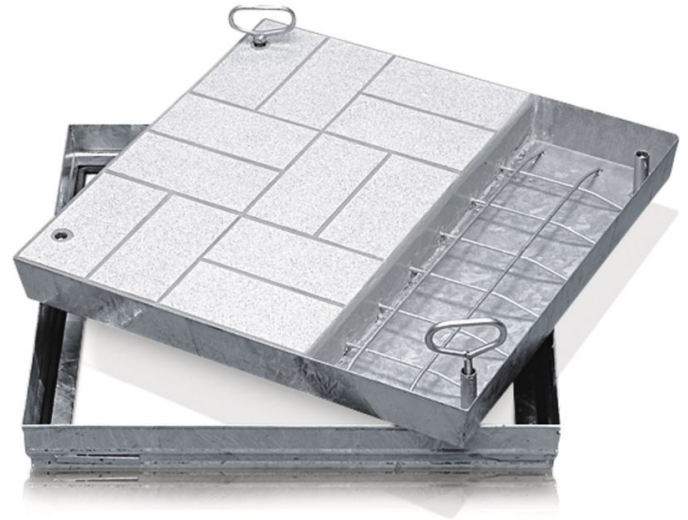

## Product features

Design height	90 mm
Inside shaft length	500 mm
Inside shaft size	500mm × 500mm
Inside shaft width	500 mm



Material, cover	Steel, galvanised
Material, frame	Steel, galvanised
Outside dimensions max. L x W x H	620 mm × 620 mm
Transport dimensions	620 mm × 620 mm × 70 mm
Trough depth	80 mm

ZARGES (U.K.) Ltd.

8 Holdom Avenue. Saxon Park Ind. Est.

Bletchley MK1 1QU

Tel: 01908 641118

Fax:

[sales@zarges.co.uk](mailto:sales@zarges.co.uk)

[www.zarges.com/uk](http://www.zarges.com/uk)

Effective 4/4/2026

Subject to change or error.