
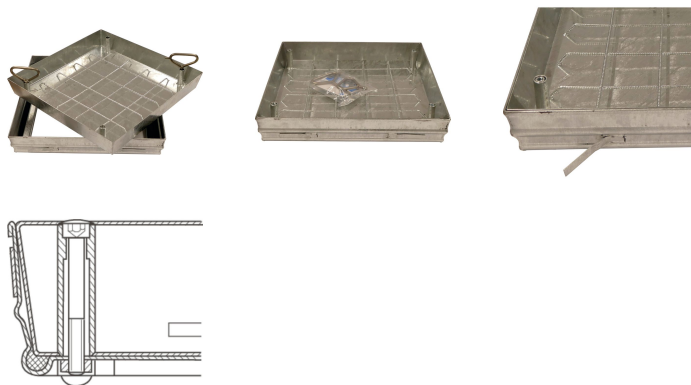


Galvanised steel shaft covers with cover trough

Shaft covers that can be walked or driven on, with customisable inner and outer surface.

Product description

- Compliant with DIN EN 124 in conjunction with DIN 1229.
- Tapering section design, therefore easy to open. No sticking.
- Easy to open, no jamming.
- Odour-tight and impervious to surface water.
- Load with choice of surface: test force 125 kN (=12.5 t), only after cover trough has been filled by customer with B 45 concrete (grain 0-8).
- Incl. lift-out handles (pair) made from stainless steel, comprising one self-lifting opening handle and one lift-out handle.
- Trough depth 80 mm (of which 40 mm covered with construction steel grating and 40 mm free area)

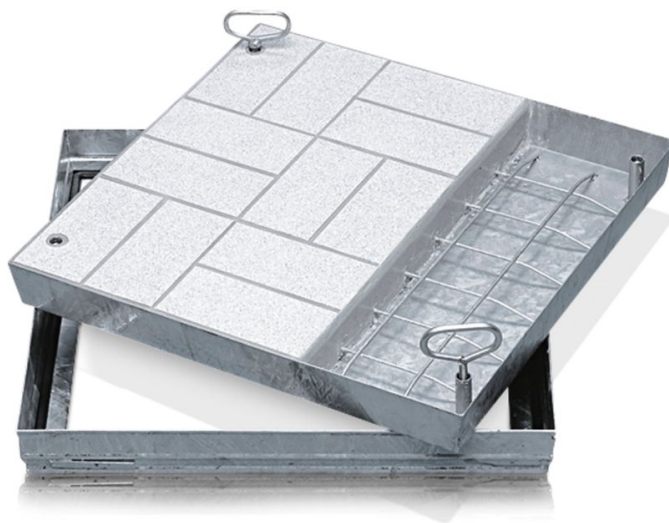

Product features

Design height	Material, cover	Material, frame	Trough depth
90 mm	Steel, galvanised	Steel, galvanised	80 mm

Product variants





SKU 47030	SKU 47031	SKU 47032
Inside shaft length 450 mm	Inside shaft length 500 mm	Inside shaft length 600 mm
Inside shaft size 450mm × 450mm	Inside shaft size 500mm × 500mm	Inside shaft size 600mm × 400mm
Inside shaft width 450 mm	Inside shaft width 500 mm	Inside shaft width 400 mm
Outside dimensions max. L x W x H 570 mm × 570 mm	Outside dimensions max. L x W x H 620 mm × 620 mm	Outside dimensions max. L x W x H 720 mm × 520 mm
Transport dimensions 570 mm × 570 mm × 70 mm	Transport dimensions 620 mm × 620 mm × 70 mm	Transport dimensions 720 mm × 520 mm × 70 mm
SKU 47033	SKU 47034	SKU 47035
Inside shaft length 600 mm	Inside shaft length 635 mm	Inside shaft length 800 mm
Inside shaft size 600mm × 600mm	Inside shaft size 635mm × 635mm	Inside shaft size 800mm × 600mm
Inside shaft width 600 mm	Inside shaft width 635 mm	Inside shaft width 600 mm
Outside dimensions max. L x W x H 720 mm × 720 mm	Outside dimensions max. L x W x H 755 mm × 755 mm	Outside dimensions max. L x W x H 920 mm × 720 mm
Transport dimensions 720 mm × 720 mm × 70 mm	Transport dimensions 750 mm × 770 mm × 90 mm	Transport dimensions 920 mm × 720 mm × 90 mm
SKU	SKU	SKU



47036	47037	47038
Inside shaft length	Inside shaft length	Inside shaft length
800 mm	1000 mm	1000 mm
Inside shaft size	Inside shaft size	Inside shaft size
800mm × 800mm	1.000mm × 600mm	1.000mm × 800mm
Inside shaft width	Inside shaft width	Inside shaft width
800 mm	600 mm	800 mm
Outside dimensions max. L x W x H	Outside dimensions max. L x W x H	Outside dimensions max. L x W x H
920 mm × 920 mm	1.120 mm × 720 mm	1.120 mm × 920 mm
Transport dimensions	Transport dimensions	Transport dimensions
920 mm × 920 mm × 90 mm	1.120 mm × 720 mm × 90 mm	1.120 mm × 920 mm × 90 mm
SKU		
47039		
Inside shaft length		
1000 mm		
Inside shaft size		
1.000mm × 1.000mm		
Inside shaft width		
1000 mm		
Outside dimensions max. L x W x H		
1.120 mm × 1.120 mm		
Transport dimensions		
1.120 mm × 1.120 mm × 90 mm		