

ZARGES


DATA SHEET

Stainless-steel shaft covers with cover trough - 470


Shaft covers that can be walked or driven on, with customisable inner and outer surface.

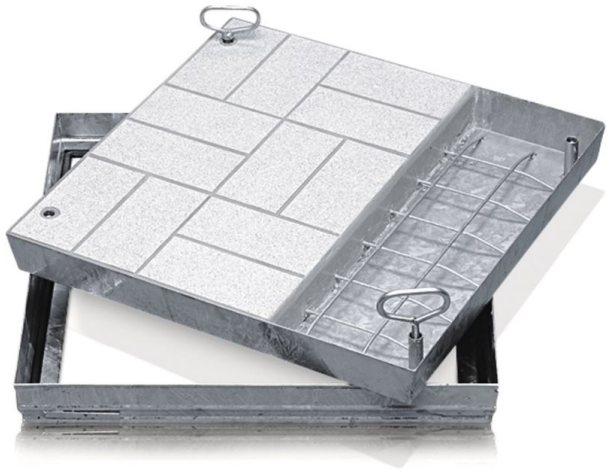









PRODUCT DESCRIPTION

- Compliant with DIN EN 124 in conjunction with DIN 1229.
- Tapering section design, therefore easy to open. No sticking.
- Easy to open, no jamming.
- Odour-tight and impervious to surface water.
- Load with choice of surface: test force 125 kN (=12.5 t), only after cover trough has been filled by customer with B 45 concrete (grain 0-8).
- Incl. lift-out handles (pair) made from stainless steel, comprising one self-lifting opening handle and one lift-out handle.
- Trough depth 80 mm (of which 40 mm covered with construction steel grating and 40 mm free area)

PRODUCT FEATURES

Property	Value
Design height	90 mm
Inside shaft length	500 mm
Inside shaft size	500mm × 500mm
Inside shaft width	500 mm
Outside dimensions max. L x W x H	620 mm × 620 mm

Property	Value
Transport dimensions	620 mm × 620 mm × 90 mm
Trough depth	80 mm

ZARGES GMBH
Zargesstraße 7
82362 Weilheim

Tel: +49 (0)881-687-100
Fax: +49 (0)881-687-500
zarges@zarges.de

www.zarges.com
Effective 11/12/2026
Subject to change or error.