


# CompactMaster S-PLUS 1T

## - 53181

The top-selling folding scaffold unit is now available with advanced guardrail and two metre platform distance for safe and fast erection.

### Product description

- The top-selling folding scaffold unit is now available with advanced guardrail and two metre platform distance for safe and fast erection.
- Basic module folds together for rapid erection and dismantling.
- Scaffolding width: 0.85 m (to the outside edge of folding unit hinge); scaffolding length: 1.80 m.
- Working heights can be extended from 3.75 m to max. 13.55 m with standard parts.
- Scaffolding Group 3 (strength up to 200 kg/m<sup>2</sup>) in accordance with DIN EN 1004-1.
- Standard casters: 150 mm swivel castors with height adjustment (order no. 42755) for precise height adjustment down to the millimeter.

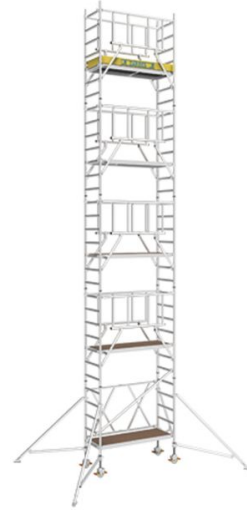

### Product features

|                            |           |
|----------------------------|-----------|
| Claw type                  | automatic |
| Height-adjustable castors: | Yes       |
| Overall height             | 9.7 m     |
| Platform height            | 8.4 m     |
| Platform length            | 1.8 m     |



|                      |                              |
|----------------------|------------------------------|
| Platform length      | 1.8 m                        |
| Platform size        | 0,6m × 1,8m                  |
| Platform width       | 0.6 m                        |
| Rung diameter        | 50 mm                        |
| Scaffolding class    | 3 (= 200 kg/m <sup>2</sup> ) |
| Standards            | EN 1004-1                    |
| Stile diameter       | 50 mm                        |
| Transport dimensions | 0 mm0 mm0 mm                 |
| Warranty             | 10 years                     |
| Weight               | 249.6 kg                     |
| Wheel diameter       | 150 mm                       |
| Width scaffolding    | 0.85 m                       |
| Working height       | 10.45 m                      |

ZARGES GmbH

Zargesstraße 7

82362 Weilheim

Tel: +49 (0)881-687-100

Fax: +49 (0)881-687-500

zarges@zarges.de

[www.zarges.com](http://www.zarges.com)

Effective 6/26/2026

Subject to change or error.