




Access steps with landing -

40155456

Stationary access to buildings and machines with platforms.

Product description

- Different angles of inclination: 45° for comfortable access, 60° for confined spaces.
- Selection of tread widths 600 mm, 800 mm or 1000 mm.
- Serrated aluminium (R10) step and platform surfaces as standard. Steel gratings (R12) and perforated steel plates (R13) are also available for higher non-slip performance.
- Individually adjustable platform lengths.
- Support section mounting element for use as a free-standing work platform.
- Customised guardrail configuration on the platform, with optional swing door or pole barrier.
- Maximum flexibility with optional handrails and guardrails which can be removed without tools.
- Stiles made from high-strength aluminium extrusions with screw channels for flexible assembly options.
- Quick and simple assembly with the ZARGES connection system with a high level of pre-assembly.

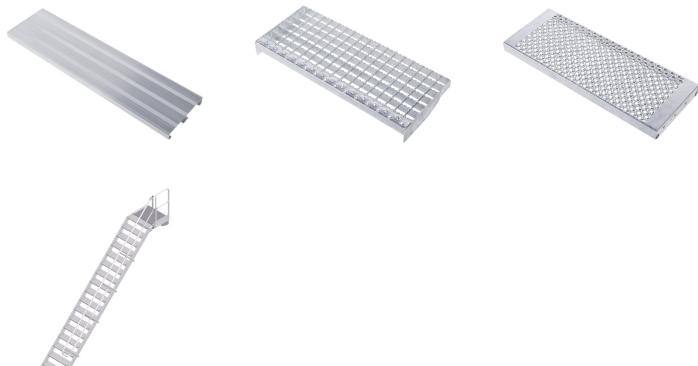

Hints and special features



ZARGES

More information about the product, accessories and spare parts:
<https://www.zarges.com/uk/products/access-steps-with-landing-40155456>



We recommend equipping the product in accordance with the German Equipment and Product Safety Act (ProdSG) with two-sided handrails and, for steps with platforms or maintenance platforms, all-round fall protection (e.g. guardrails). If handrails or guardrails are not desired, the operator must ensure sufficient regulatory protection.

Standard applied: DIN EN ISO 14 122.

Product features

Inclination 45 °	Load capacity max. 300 kg	Max. load per tread 150 kg	Number of treads 17	Overall span 4311 mm
Platform length 600 mm	Standards NF EN ISO 14122-4	Tread width 800 mm	Vertical height 3650 mm	Warranty 10 years