

DATA SHEET

Steel shaft covers, galvanised steel with trough - 47039


Walkable or drivable shaft covers with choice of surface for indoor and outdoor use.



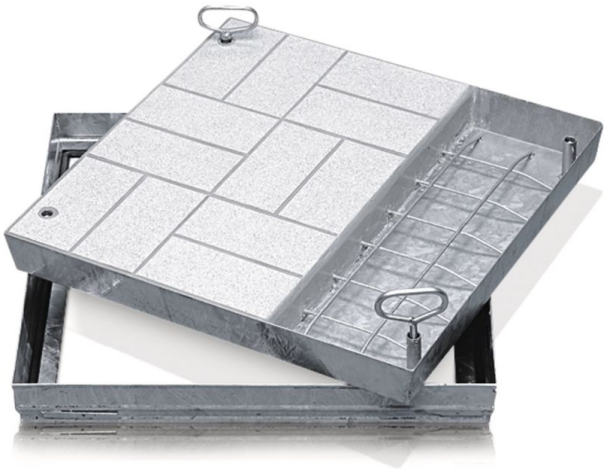







PRODUCT DESCRIPTION

- Compliant with DIN EN 124 in conjunction with DIN 1229.
- Tapered profile-section construction with multiple bolted joints.
- Easy to open, no jamming.
- Odour-tight and impervious to surface water.
- Load capacity for shaft cover with cover trough: test force 125 kN (= 12.5 t), only after the cover trough has been filled with B 45 concrete (grain 0-8).
- Incl. lift-out handles (pair) made from stainless steel, comprising one self-lifting opening handle and one lift-out handle.
- Trough depth 80 mm (of which 40 mm covered with construction steel grating and 40 mm free area)

PRODUCT FEATURES

Property	Value
Design height	90 mm
Inside shaft length	1000 mm
Inside shaft size	1.000mm × 1.000mm
Inside shaft width	1000 mm
Material, cover	Steel, galvanised

Property	Value
Material, frame	Steel, galvanised
Outside dimensions max. L x W x H	1.120 mm × 1.120 mm
Transport dimensions	1.120 mm × 1.120 mm × 90 mm
Trough depth	80 mm

ZARGES (U.K.) LTD.
Blackwater Trading Estate,
The Causeway
CM9 4LJ Maldon, Essex

Tel: 01908 641118
sales@zarges.co.uk

www.zarges.com/uk
Effective 12/11/2026
Subject to change or error.