




Multi-section fixed ladder systems, natural aluminium

Multi-section access solution with crossover platform for buildings and machinery.

Product description

- For permanent mounting on buildings either for maintenance in accordance with DIN 18 799-1 or as an emergency ladder system in accordance with DIN 14 094-1 or as machine access steps in accordance with DIN EN ISO 14 122-4.
- With safety cage.
- Ladder width: 520 mm.
- Wall brackets with various wall clearances of up to 600 mm can be selected.
- The maximum permissible distance between two wall brackets is 2.00 m. But each ladder section must be mounted with at least two wall brackets.
- Safety barriers, access protection and platforms can be selected to suit individual requirements.
- We can also produce fixed-ladder designs that differ from the standard specification on request.

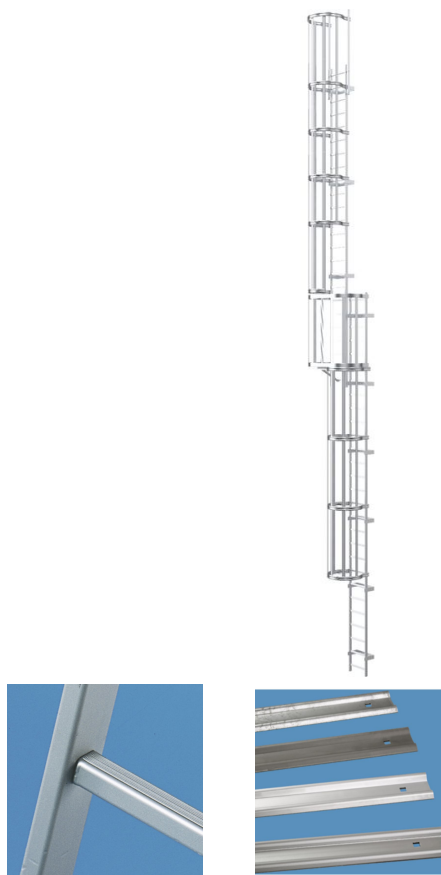

Hints and special features

Dowels and screws/bolts for wall mounting are not included in the scope of delivery.

The prices for double-section systems listed below are




calculated as follows: Wall bracket in the form of a U-bar, 200 mm rigid, straight stile extensions on both sides, crossover platform, incl. back cage in accordance with DIN 18 799-1. In the case of other requirements, please use our planning system for fixed ladders.

Product features

Material	Warranty
Natural aluminium	10 years

Product variants

SKU 58607	SKU 58618	SKU 58626
Overall length incl. stile 11.8 m	Overall length incl. stile 12.9 m	Overall length incl. stile 13.7 m
access height 10.7 m	access height 11.8 m	access height 12.6 m
SKU 58638	SKU 58649	SKU 58657
Overall length incl. stile 14.9 m	Overall length incl. stile 16 m	Overall length incl. stile 16.8 m
access height 13.8 m	access height 14.9 m	access height 15.7 m
SKU 58668	SKU 58680	SKU 58691



Overall length incl. stile	Overall length incl. stile	Overall length incl. stile
17.9 m	19.1 m	20.2 m
access height	access height	access height
16.8 m	18 m	19.1 m