




Multi-section fixed ladder systems, V4A stainless steel

Multi-section access solution with crossover platform for buildings and machinery.

Product description

- For permanent installation to BGV D 36 and DIN 18 799-1, DIN 14 094-1 and EN ISO 14 122-4.
- With back guards.
- Ladder width: 520 mm.
- Wall brackets with various wall distances up to 600 mm can be selected.
- The distance between the wall brackets is max. 2.00 m. But each ladder section must be mounted with at least 2 wall brackets.
- Safety barriers, access protection and platforms can be selected to suit individual requirements.
- On request, we can also produce fixed-ladders that differ from the standard specifications.

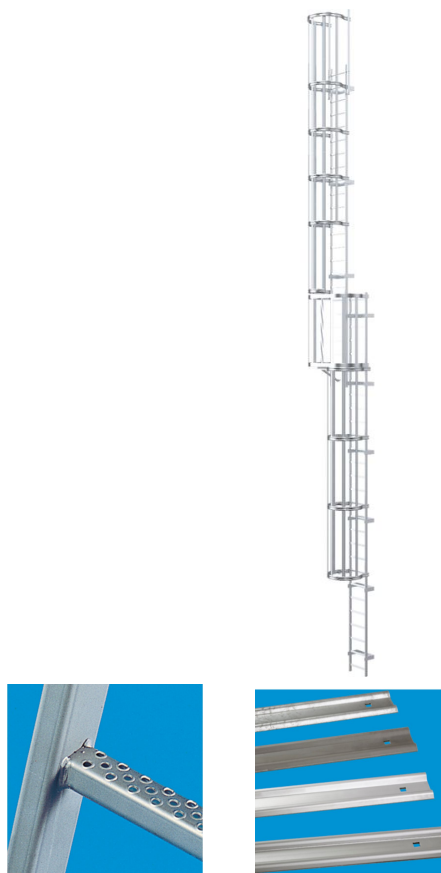

Hints and special features

Dowels and screws/bolts for wall mounting are not included in the scope of delivery.

The prices for double-section systems listed below are calculated as follows: Wall bracket in the form of a U-bar, 200 mm rigid, straight stile extensions on both sides, crossover platform, incl. back cage in accordance with DIN 18 799-1. In the case of other requirements, please use our planning system for fixed ladders.


Product features

Material

Stainless steel

Warranty

10 years



Product variants

SKU 58807	SKU 58818	SKU 58826
Overall length incl. stile 11.8 m	Overall length incl. stile 12.9 m	Overall length incl. stile 13.7 m
access height 10.7 m	access height 11.8 m	access height 12.6 m
SKU 58838	SKU 58849	SKU 58857
Overall length incl. stile 14.9 m	Overall length incl. stile 16 m	Overall length incl. stile 16.8 m
access height 13.8 m	access height 14.9 m	access height 15.7 m
SKU 58868	SKU 58880	SKU 58891
Overall length incl. stile 17.9 m	Overall length incl. stile 19.1 m	Overall length incl. stile 20.2 m
access height 16.8 m	access height 18 m	access height 19.1 m